



BSM

Recessed ceiling-mounted downlights with symmetrical light distribution to achieve task, accent or general lighting.

Circular design with trimless appearance available in several diameters: 88mm, 97mm, 141mm, 158mm and 172mm.

Aluminium body and interior circle powder painted in various finishes, customized RAL under request.

To complete the effect of this fixture, it is also recommended that the inner ring should be painted the same RAL colour as the ceiling.

Extensive range of reflectors to achieve the best photometric results.

High-purity aluminium interior reflector in various finishes: facettted metalized or sandblasted anodised depending on the beam angle outcome.

Tridonic remote driver included.

Passive temperature management: heat dissipation flows through an aluminium heat sink.

Ceiling-mounted using galvanised steel support with spring clamps or screws.


Suggested applications: apartments, shops, restaurants, hotels and similar installations.

CRI >80	CRI >90	2700K	3000K	4000K	SDCM 3	IP20	A ⁺ A ⁺⁺
---------	---------	-------	-------	-------	--------	------	--------------------------------



ø 88mm

± 98mm
± 108mm




480lm - 1270lm

5W - 12.2W



ø 88mm

± 112mm
± 122mm




480lm - 1270lm

5W - 12.2W



ø 141mm

± 146mm

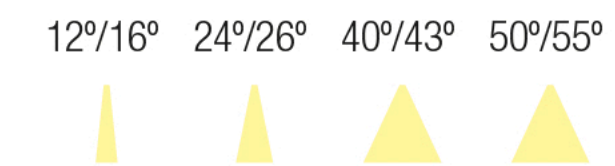


1610lm - 3850lm

12W - 24W



ø 172mm

± 193mm
± 218mm

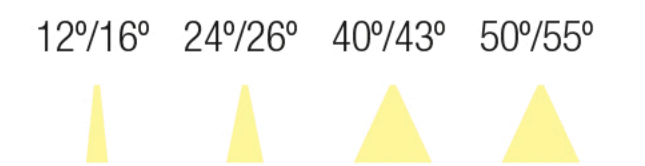


1610lm - 7420lm

12W - 50W



ø 97mm

± 98mm
± 108mm




480lm - 1270lm

5W - 12.2W



ø 97mm

± 108mm
± 118mm




480lm - 1270lm

5W - 12.2W



ø 158mm

± 180mm
± 231mm

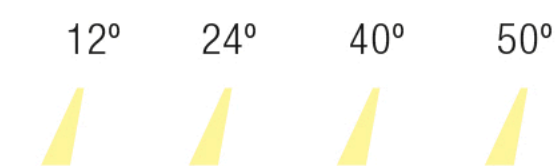


1610lm - 3850lm

12W - 24W



ø 172mm

± 226mm
± 281mm

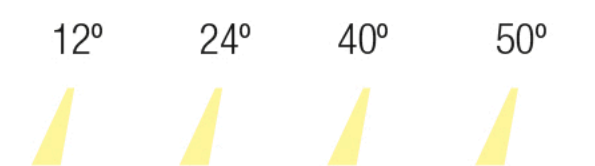

1610lm - 3850lm

12W - 24W

ELECTRONIC OPTIONS

On/Off.


Phase Cut.

0-10V / 1-10V.

DALI/DSI/switchDIM/corridorFUNCTION.

Emergency Kit.

ACCESSORIES AND FINISHES

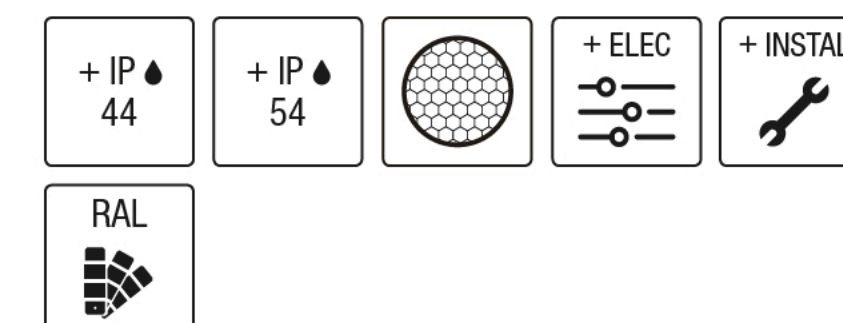

SPECIAL APPLICATIONS

