



CELENO

Proiettore **IP67** orientabile, a pavimento/parete/soffitto, da interno o esterno, ideale per l'illuminazione di statue, alberi, ingressi, facciate.

*Adjustable **IP67** projector, for indoor and outdoor floor, wall, and ceiling applications, ideal for the lighting of statues, trees, entrances, facades.*



CELENO 1



CELENO 2



CELENO 4

CELENO 1

CELENO



Materiale
Material

Corpo in alluminio anticorrosivo
Anticorrosive aluminium body

Staffa in acciaio inox satinato
Satinized stainless steel bracket

Vetro temperato trasparente serigrafato
Silk-screen printed tempered glass

Pot. Assorbita
Abs. Power

- 1 version **1 x 6W**
- 2 version **2 x 6W**
- 4 version **4 x 6W**

Collegamento
Connection

24Vdc - Parallelo | Parallel

Cablaggio
Wiring

Fornito con 50 cm di cavo e WP System
Provided with 50 cm cable and WP System

Installazione
Installation

A terra, a parete o soffitto con staffa (inclusa)
Floor, wall or ceiling mounting with brackets (included)

A terra con picchetto (non incluso)
On ground with peg (not included)

Alimentatore
Driver

24Vdc (Non incluso | Not included)

Finitura
Finishing


- .01 Alluminio anodizzato** | Anodized aluminium
- .02 Bianco opaco** | Matt white RAL9003
- .08 Nero opaco** | Matt black RAL9005
- .09 Corten**

Disponibile su richiesta
Also available

- 5000 K**
- Rosso** | Red (2W per LED)
- Verde** | Green (2W per LED)
- Blu** | Blue (2W per LED)
- Dimmerabile** | Dimmable
- Lunghezza cavo su misura senza WP System p.511**
Customized cable length without WP System p.511



CELENO 1



IP67 CE III WP kg 0,39


	SUPPLY	W	LM	OPTICS	LED COLOR	CODE	+	FINISHING
	24Vdc	6	660	12°	3000 K	CEL21231	.01 .02 .08 .09	
	24Vdc	6	720	12°	4000 K	CEL21241	.01 .02 .08 .09	
	24Vdc	6	660	28°	3000 K	CEL21232	.01 .02 .08 .09	
	24Vdc	6	720	28°	4000 K	CEL21242	.01 .02 .08 .09	
	24Vdc	6	660	45°	3000 K	CEL21233	.01 .02 .08 .09	
	24Vdc	6	720	45°	4000 K	CEL21243	.01 .02 .08 .09	

ALIMENTATORI OBBLIGATORI | REQUIRED POWER SUPPLIES:

24Vdc (6W) IP67

- AE24018 [18W] (1/2 Fixtures)
- AE24035 [35W] (1/4 Fixtures)
- AE24060 [60W] (1/8 Fixtures)

CELENO 2



IP67 CE III WP kg 0,6

	SUPPLY	W	LM	OPTICS	LED COLOR	CODE	+	FINISHING
	24Vdc	12	1500	12°	3000 K	CEL22231	.01 .02 .08 .09	
	24Vdc	12	1650	12°	4000 K	CEL22241	.01 .02 .08 .09	
	24Vdc	12	1500	28°	3000 K	CEL22232	.01 .02 .08 .09	
	24Vdc	12	1650	28°	4000 K	CEL22242	.01 .02 .08 .09	
	24Vdc	12	1500	45°	3000 K	CEL22233	.01 .02 .08 .09	
	24Vdc	12	1650	45°	4000 K	CEL22243	.01 .02 .08 .09	


ALIMENTATORI OBBLIGATORI | REQUIRED POWER SUPPLIES:

24Vdc (12W) IP67


- AE24018 [18W] (1 Fixture)
- AE24035 [35W] (1/2 Fixtures)
- AE24060 [60W] (1/4 Fixtures)

Composizione Composition	-D1	-D2	-D3	-D4	Sistema di controllo Control System
CEL21231.01-Dx Dimmable power supply	Push	-	DALI	1-10V	Alimentatori dimmerabili p.516 Dimmable power supplies
CEL21231.01-Dx Dimmable 24Vdc controller + 24Vdc power supply	Push	DMX	DALI	1-10V	Centraline 24Vdc dimmerabili p.519 Dimmable 24Vdc Controllers

Celeno 1 Prodotto | Product




Celeno 2 Prodotto | Product




ACCESSORI | ACCESSORIES

Picchetto | Peg Code: PI002



CELENO 4



IP67 CE III WP kg 0,9


	SUPPLY	W	LM	OPTICS	LED COLOR	CODE	+ FINISHING
	24Vdc	24	3000	12°	3000 K	CEL23231	.01 .02 .08 .09
	24Vdc	24	3280	12°	4000 K	CEL23241	.01 .02 .08 .09
	24Vdc	24	3000	28°	3000 K	CEL23232	.01 .02 .08 .09
	24Vdc	24	3280	28°	4000 K	CEL23242	.01 .02 .08 .09
	24Vdc	24	3000	45°	3000 K	CEL23233	.01 .02 .08 .09
	24Vdc	24	3280	45°	4000 K	CEL23243	.01 .02 .08 .09

ALIMENTATORI OBBLIGATORI | REQUIRED POWER SUPPLIES:

24Vdc (24W) IP67

AE24035	[35W]	(1 Fixture)
AE24060	[60W]	(1/2 Fixtures)
AE24100ND	[100W]	(1/3 Fixtures)

Celeno 4 Prodotto | Product

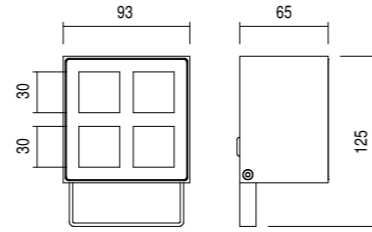

ACCESSORI | ACCESSORIES

Picchetto | Peg Code: PI002



Composizione Composition	-D1	-D2	-D3	-D4	Sistema di controllo Control System
CEL21231.01-Dx Dimmable power supply	Push	-	DALI	1-10V	Alimentatori dimmerabili p.516 Dimmable power supplies
CEL21231.01-Dx Dimmable 24Vdc controller + 24Vdc power supply	Push	DMX	DALI	1-10V	Centraline 24Vdc dimmerabili p.519 Dimmable 24Vdc Controllers