

ORBIT[®]

48

170A TRACK SYSTEM

you're
on the
right
track

4	system
6	introduction
8	overview
10	depths & mountings
12	component overview
14	compatibility
16	magnetic mounting
17	light temperatures
18	dim-to-warm
19	wireless
20	colors
22	corners & configurations
24	luminaires
26	tublr medium
34	tublr mini
40	tubed suspension
42	traxx mini
44	traxx rithm
46	tracks
48	track profiles
54	dimensions
56	casambi
57	power supplies
58	wiring diagram

the



system

TRACKS
LUMINAIRES
MOUNTING OPTIONS
COLORS






CHECK, CHECK, DOUBLE CHECK.

slender tracks slim luminaires smart controls saving energy

The ORBIT 48V TRACK SYSTEM combines unornamented aesthetics with a multitude of configuration options and effortless installation. The outcome is an ecosystem of quality components perfect for spaces where constant flexibility and high performance are required.

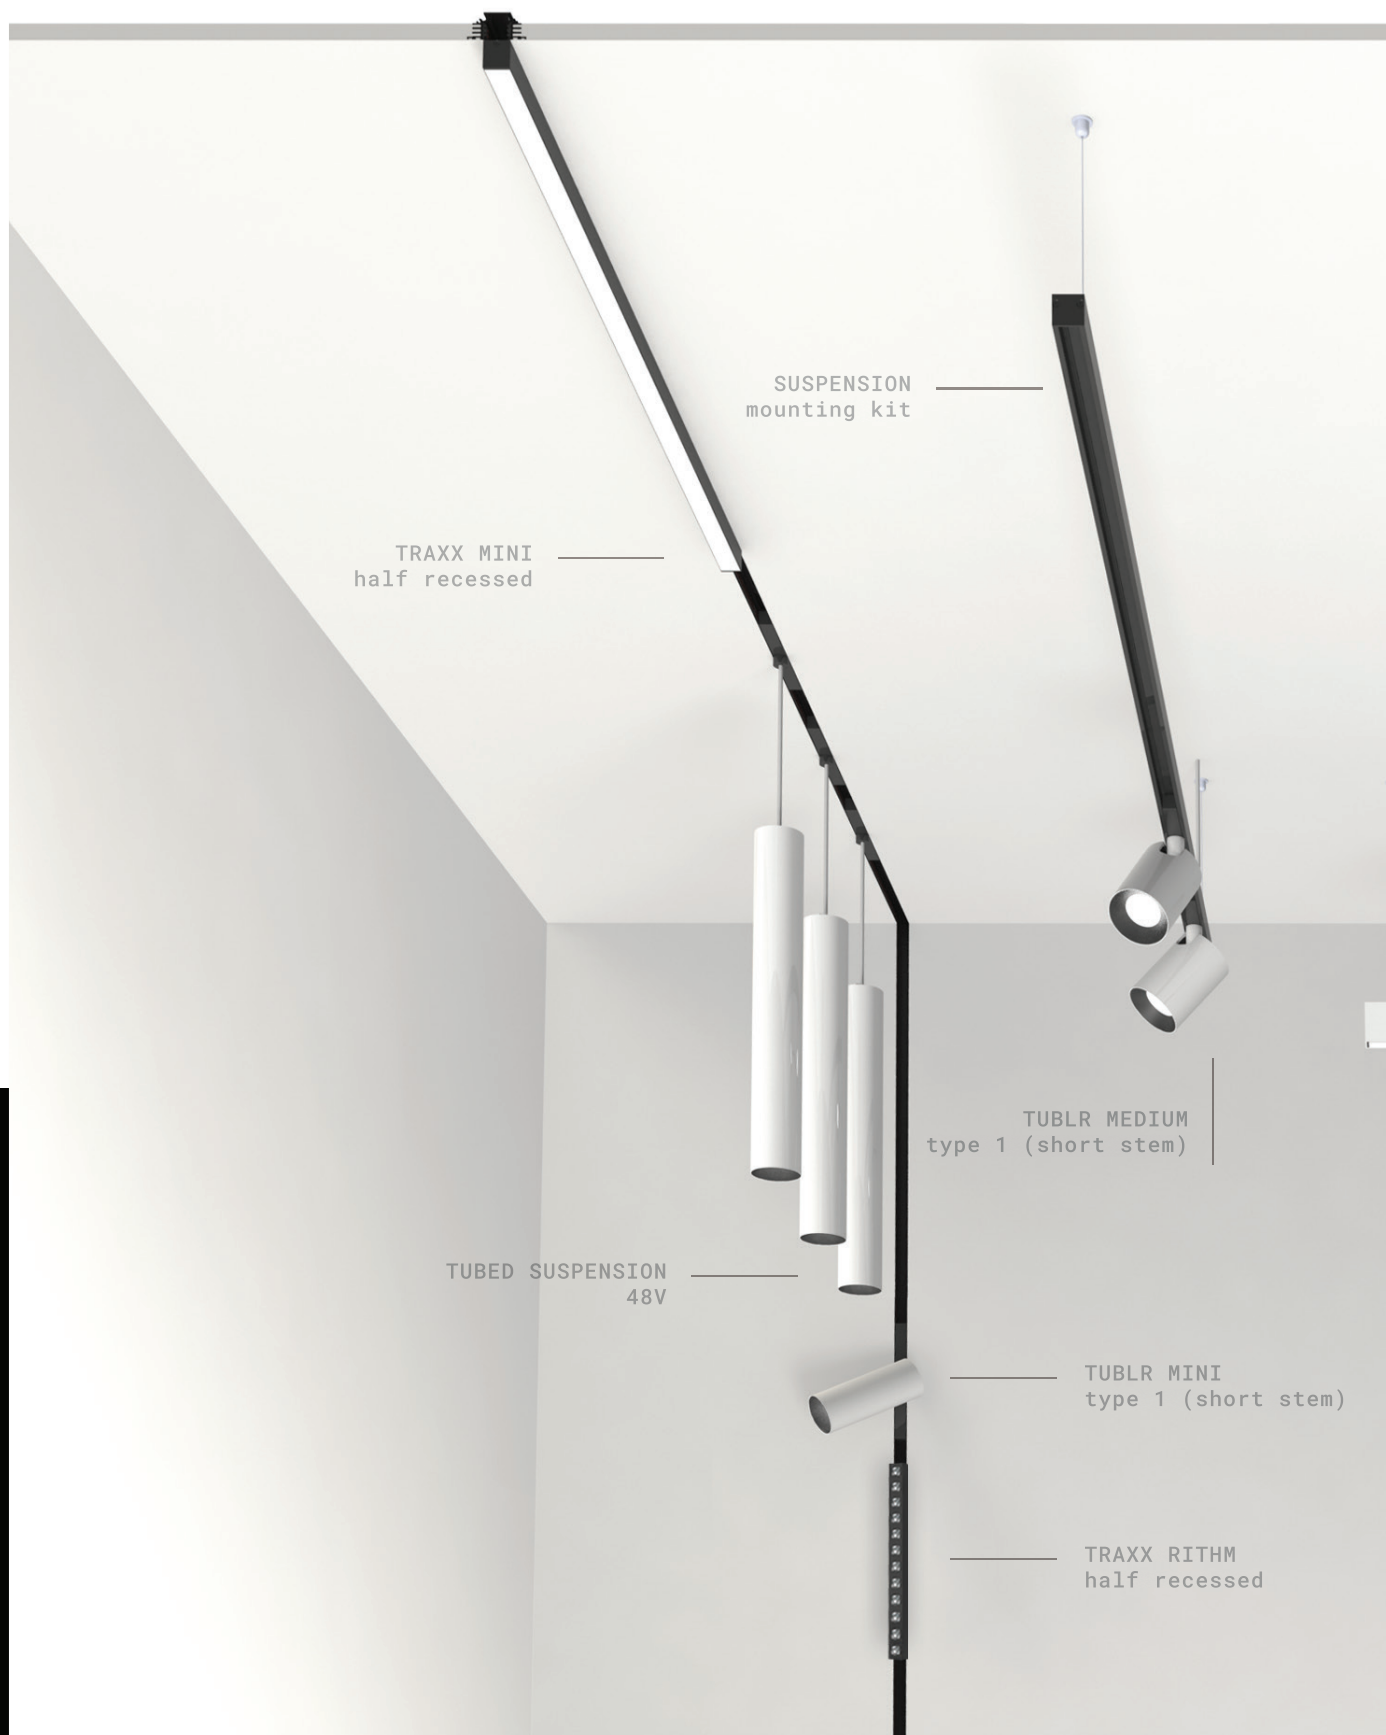



TUBLR MEDIUM
type 2 (long stem)

TRAXX MINI
flush with surface

TUBLR MINI
type 2 (long stem)

TRAXX RITHM
flush with surface

two profile depths, three mounting options

TYPE 1
SLIM - SUSPENSION




TYPE 1
SLIM - CEILING




TYPE 1
SLIM - RECESSED




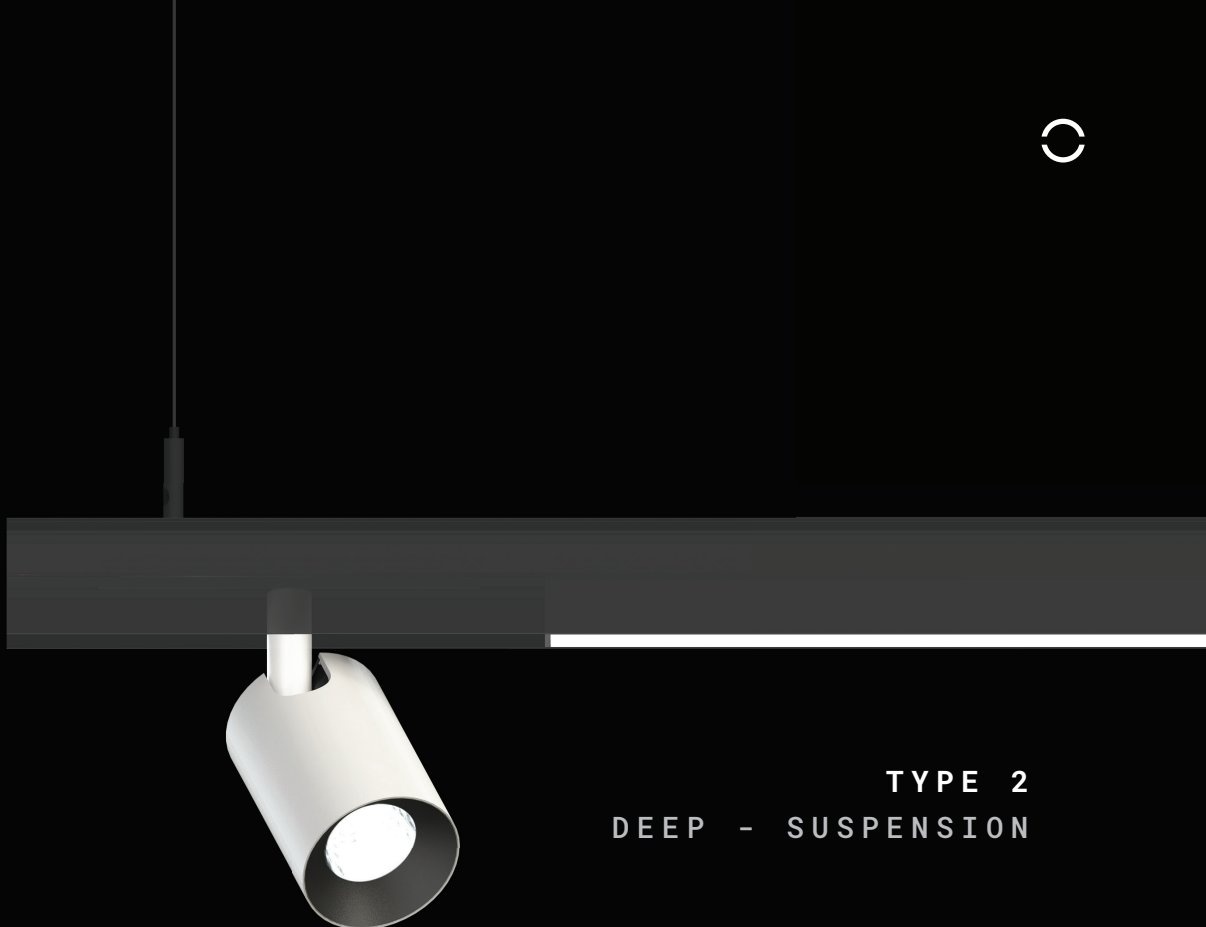









TYPE 2
DEEP - SUSPENSION

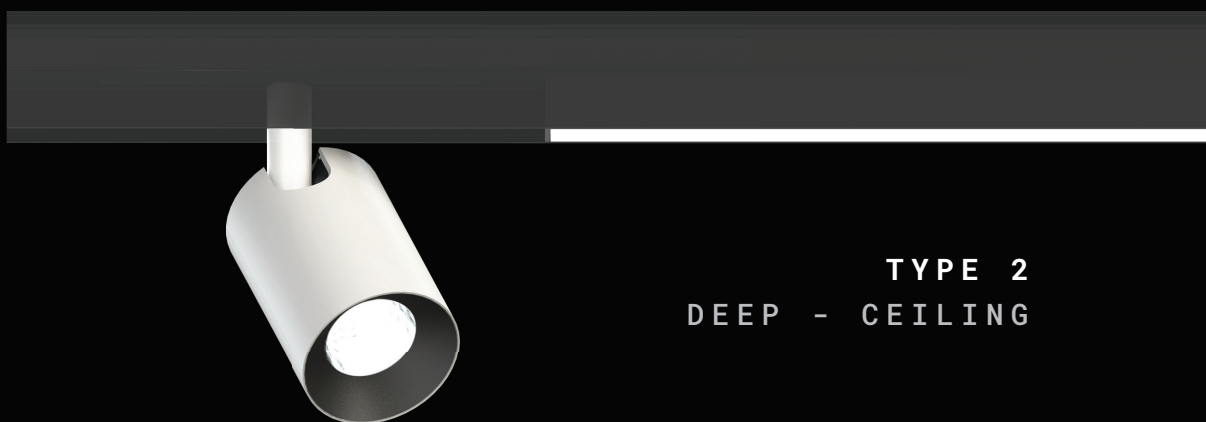


TYPE 2
DEEP - CEILING

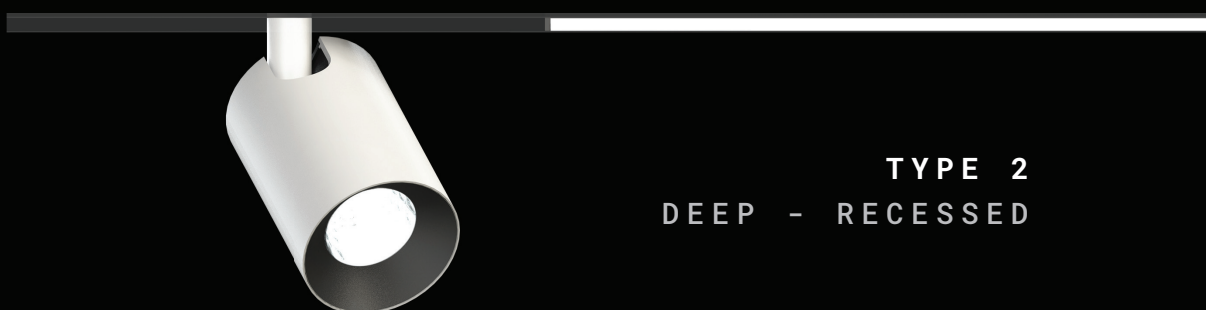


TYPE 2
DEEP - RECESSED

SPOT	
 TYPE 1 / TUBLR MEDIUM (SHORT STEM)	 TYPE 1 / TUBLR MINI (SHORT STEM)
 TYPE 2 / TUBLR MEDIUM (LONG STEM)	 TYPE 2 / TUBLR MINI (LONG STEM)
SUSPENSION	LINEAR
 TUBED SUSPENSION 48V	 TRAXX MINI
	 TRAXX RITHM
	 TRAXX RITHM LENS


SURFACE



TYPE 1




TYPE 1




TYPE 2


SUSPENSION



TYPE 1




TYPE 1




TYPE 2

RECESSED - TRIMLESS



MIN. INSTALLATION HEIGHT: 105 mm


RECESSED TYPE 1
12,5 MM / 15 MM / 18 MM

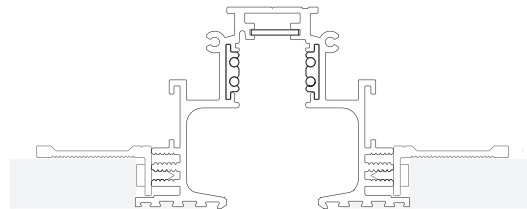


MIN. INSTALLATION HEIGHT: 125 mm

RECESSED TYPE 2
12,5 MM / 15 MM / 18 MM

RECESSED - TRIM

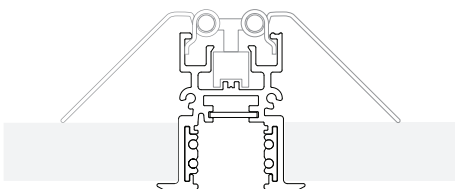




RECESSED TRIM TYPE 1
AVAILABLE SOON

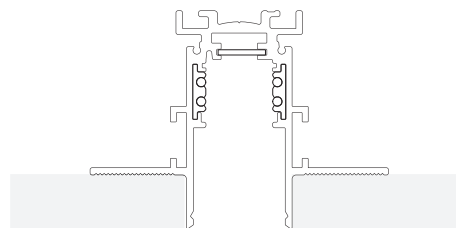

MIN. INSTALLATION HEIGHT: 80 mm
INSTALL RAIL BEFORE ADDING CEILING

RECESSED TYPE 2 / 12,5MM

compatibility

	 TYPE 1 SURFACE SUSPENSION	 TYPE 1 SURFACE SUSPENSION	 TYPE 1 RECESSED TRIMLESS	 TYPE 2 SURFACE SUSPENSION	 TYPE 2 RECESSED TRIMLESS	 TYPE 2 RECESSED TRIMLESS
 TUBLR MEDIUM TYPE 1	✓	✓	✓			
 TUBLR MEDIUM TYPE 2	✓	✓	✓	✓	✓	✓
 TUBLR MINI TYPE 1	✓	✓	✓			
 TUBLR MINI TYPE 2	✓	✓	✓	✓	✓	✓
 TUBED SUSPENSION	✓	✓	✓	✓	✓	✓
 TRAXX MINI/RITHM	✓	✓	✓	✓	✓	✓

 COMPATIBLE
  COMPATIBLE - INCREASED DISTANCE BETWEEN TRACK & LUMINAIRE



magnetic snap mounting



All
luminaires
have a magnetic adapter.
This eliminates the need for
installation tools, giving
you the freedom to adjust the
position and rotation at any
time. It only takes a matter
of seconds and one simple
hand movement to remove a
luminaire.



Choose from
a wide range
of color
temperatures,
CRI values
and dimming
protocols.



light colors


set the mood

Create a more
intimate setting
with our **DIM-TO-WARM**
technology.

Dim the light for a
softer glow and a
warmer light color.
Tadaa, instant
coziness!

DIM-TO-WARM is
available for all
48V spotlights.



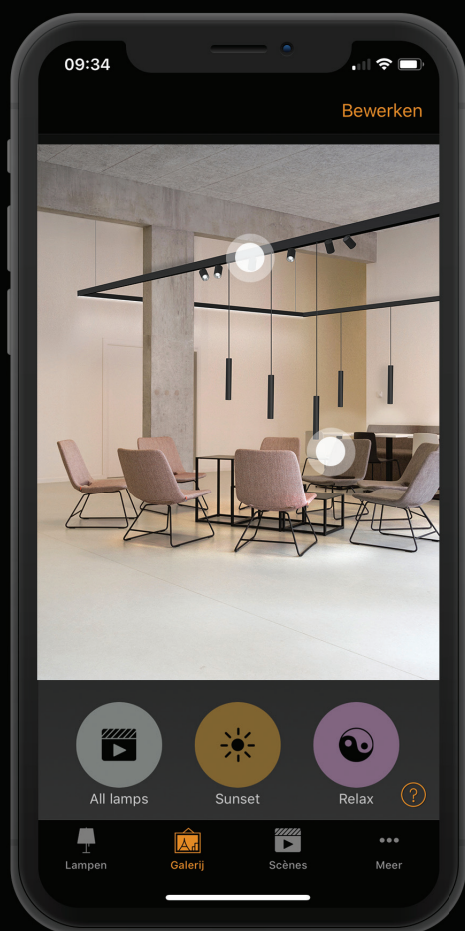

wireless controls

Seamless and instant
control and dimming
with the remote app
for iOS and Android.

color combinations

WHITE + BLACK

WHITE + DARK CHROME

WHITE + GOLD

WHITE + WHITE

BLACK + BLACK


BLACK + DARK CHROME

BLACK + GOLD

BLACK + WHITE






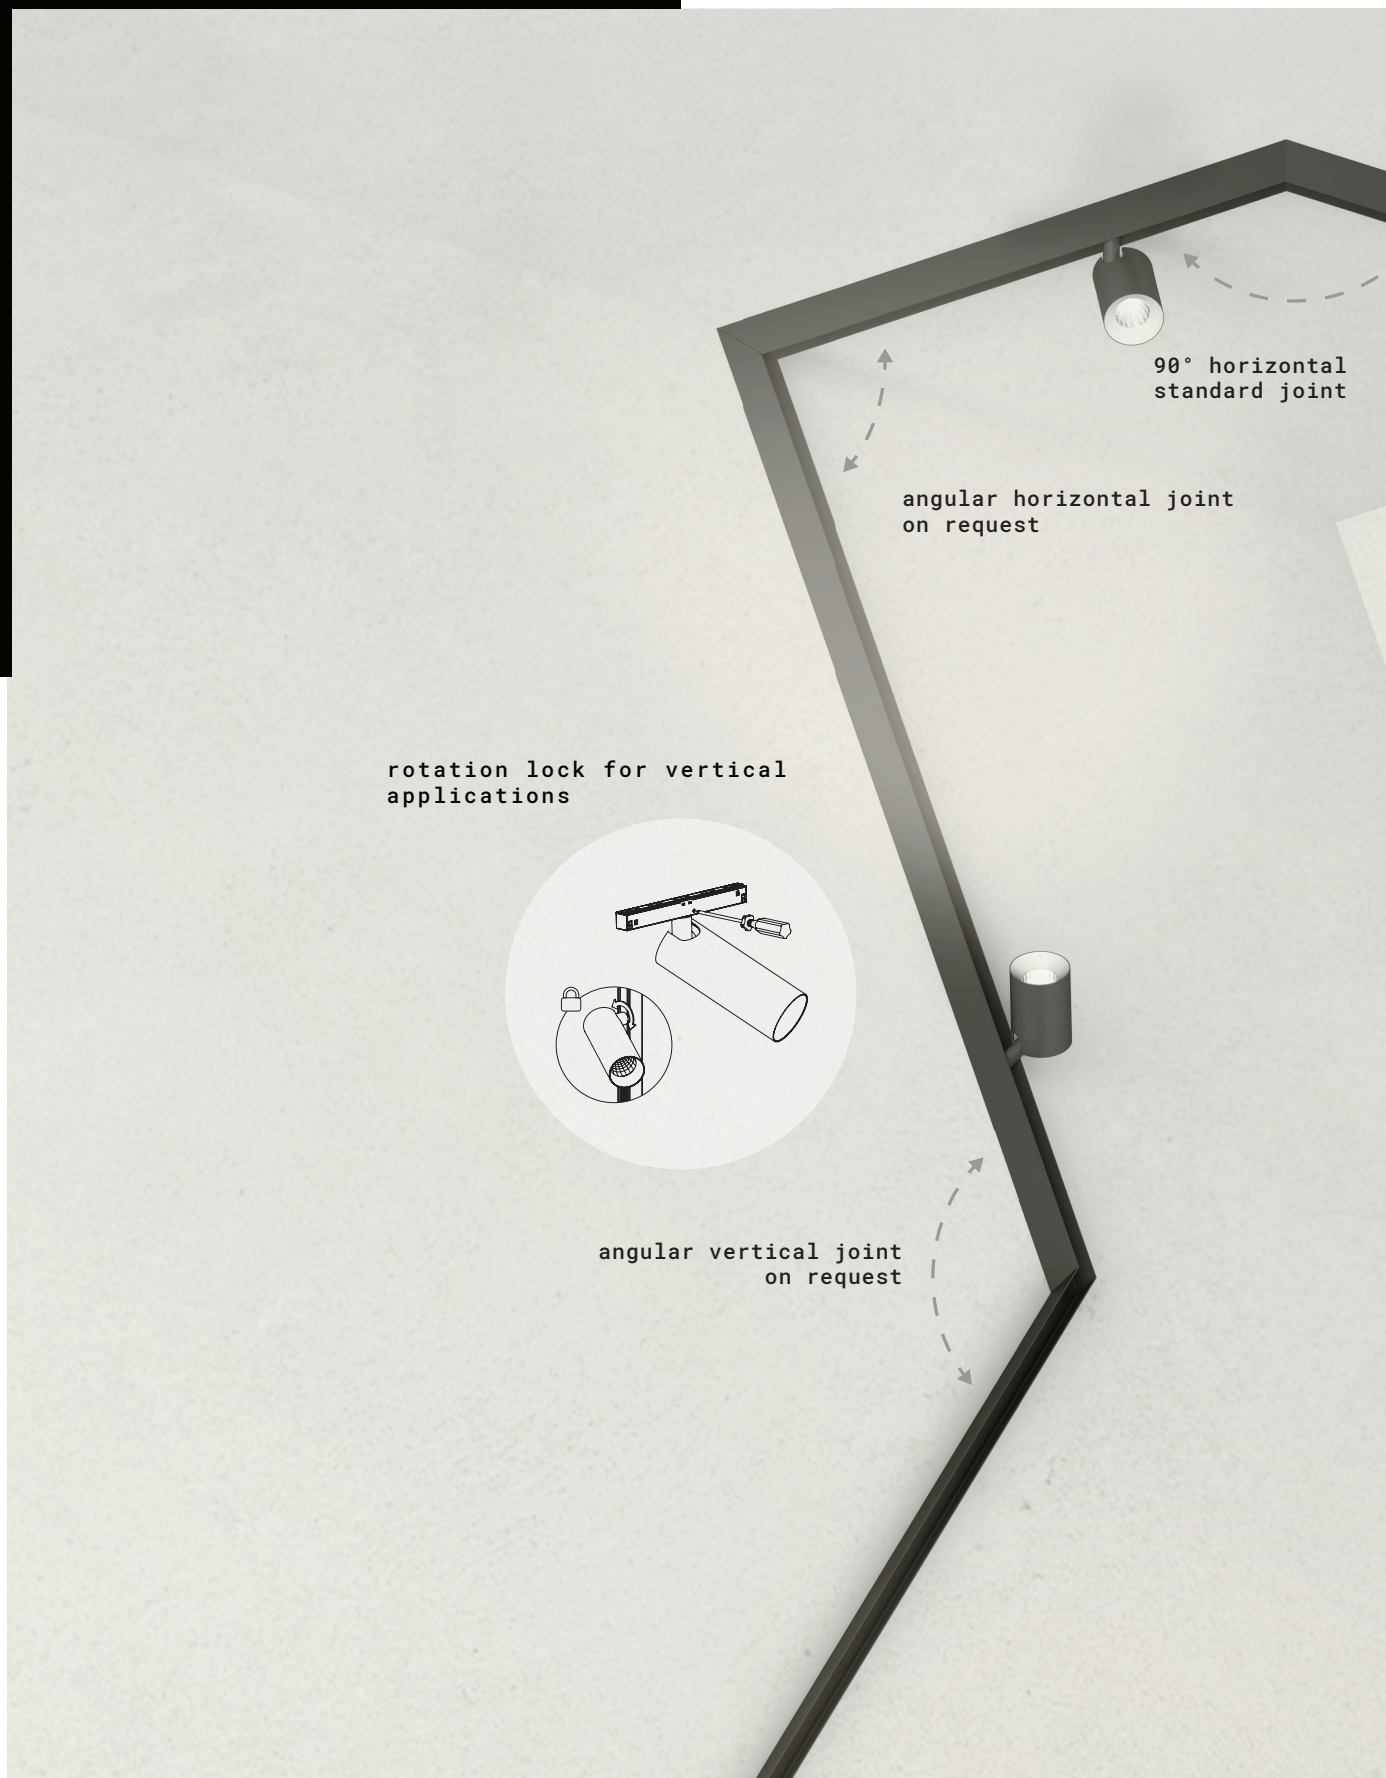



luminaire



TUBLR
TUBED
TRAXX



ires



tublr medium

48V track


TYPE 1



1x **COB LED** max1200lm 2700k



A A+ A++



NON DIMMABLE

WH/WH/WH	24°	11W	F097021A CL10_24	WW
WH/WH/BLK	24°	11W	F097021-2A CL10_24	WW
WH/WH/GLD	24°	11W	F097021-4A CL10_24	WW
WH/WH/DKC	24°	11W	F097021-5A CL10_24	WW
WH/BLK/BLK	24°	11W	F097021-2-2A CL10_24	WW
WH/BLK/WH	24°	11W	F097021-2-1A CL10_24	WW
WH/BLK/GLD	24°	11W	F097021-2-4A CL10_24	WW
WH/BLK/DKC	24°	11W	F097021-2-5A CL10_24	WW
BLK/BLK/BLK	24°	11W	F097022A CL10_24	WW
BLK/BLK/WH	24°	11W	F097022-1A CL10_24	WW
BLK/BLK/GLD	24°	11W	F097022-4A CL10_24	WW
BLK/BLK/DKC	24°	11W	F097022-5A CL10_24	WW
BLK/WH/WH	24°	11W	F097022-1-1A CL10_24	WW
BLK/WH/BLK	24°	11W	F097022-1-2A CL10_24	WW
BLK/WH/GLD	24°	11W	F097022-1-4A CL10_24	WW
BLK/WH/DKC	24°	11W	F097022-1-5A CL10_24	WW

1-10V DIMMABLE

WH/WH/WH	24°	11W	F097021B CL10_24	WW
WH/WH/BLK	24°	11W	F097021-2B CL10_24	WW
WH/WH/GLD	24°	11W	F097021-4B CL10_24	WW
WH/WH/DKC	24°	11W	F097021-5B CL10_24	WW
WH/BLK/BLK	24°	11W	F097021-2-2B CL10_24	WW
WH/BLK/WH	24°	11W	F097021-2-1B CL10_24	WW
WH/BLK/GLD	24°	11W	F097021-2-4B CL10_24	WW
WH/BLK/DKC	24°	11W	F097021-2-5B CL10_24	WW
BLK/BLK/BLK	24°	11W	F097022B CL10_24	WW
BLK/BLK/WH	24°	11W	F097022-1B CL10_24	WW
BLK/BLK/GLD	24°	11W	F097022-4B CL10_24	WW
BLK/BLK/DKC	24°	11W	F097022-5B CL10_24	WW
BLK/WH/WH	24°	11W	F097022-1-1B CL10_24	WW
BLK/WH/BLK	24°	11W	F097022-1-2B CL10_24	WW
BLK/WH/GLD	24°	11W	F097022-1-4B CL10_24	WW
BLK/WH/DKC	24°	11W	F097022-1-5B CL10_24	WW

HONEYCOMB D50

BS0298


ALTERNATIVE LIGHT COLOUR	REPLACE WW BY
WARM WHITE	2700K WW
NEUTRAL WHITE	3000K NW
MEDIUM WHITE	3500K MW
COLD WHITE	4000K CW

! 40° beam angle on request > ref=40

1x **COB LED** max1200lm 2700k



A A+ A++



DALI DIMMABLE

WH/WH/WH	24°	11W	F097021D CL10_24	WW
WH/WH/BLK	24°	11W	F097021-2D CL10_24	WW
WH/WH/GLD	24°	11W	F097021-4D CL10_24	WW
WH/WH/DKC	24°	11W	F097021-5D CL10_24	WW
WH/BLK/BLK	24°	11W	F097021-2-2D CL10_24	WW
WH/BLK/WH	24°	11W	F097021-2-1D CL10_24	WW
WH/BLK/GLD	24°	11W	F097021-2-4D CL10_24	WW
WH/BLK/DKC	24°	11W	F097021-2-5D CL10_24	WW
BLK/BLK/BLK	24°	11W	F097022D CL10_24	WW
BLK/BLK/WH	24°	11W	F097022-1D CL10_24	WW
BLK/BLK/DKC	24°	11W	F097022-4D CL10_24	WW
BLK/BLK/GLD	24°	11W	F097022-5D CL10_24	WW
BLK/WH/BLK	24°	11W	F097022-1-1D CL10_24	WW
BLK/WH/WH	24°	11W	F097022-1-2D CL10_24	WW
BLK/WH/GLD	24°	11W	F097022-1-4D CL10_24	WW
BLK/WH/DKC	24°	11W	F097022-1-5D CL10_24	WW

HONEYCOMB D50

BS0298

ALTERNATIVE LIGHT COLOUR	REPLACE WW BY
WARM WHITE	2700K WW
NEUTRAL WHITE	3000K NW
MEDIUM WHITE	3500K MW
COLD WHITE	4000K CW


! 40° beam angle on request > ref=40



1x COB LED max600lm 2200k up to 3000k



A A⁺ A⁺⁺



1-10V DIMMABLE

WH/WH/WH	40°	6W	F097021B CL6.40 DW
WH/WH/BLK	40°	6W	F097021-2B CL6.40 DW
WH/WH/GLD	40°	6W	F097021-4B CL6.40 DW
WH/WH/DKC	40°	6W	F097021-5B CL6.40 DW
WH/BLK/BLK	40°	6W	F097021-2-2B CL6.40 DW
WH/BLK/WH	40°	6W	F097021-2-1B CL6.40 DW
WH/BLK/GLD	40°	6W	F097021-2-4B CL6.40 DW
WH/BLK/DKC	40°	6W	F097021-2-5B CL6.40 DW
BLK/BLK/BLK	40°	6W	F097022B CL6.40 DW
BLK/BLK/WH	40°	6W	F097022-1B CL6.40 DW
BLK/BLK/GLD	40°	6W	F097022-4B CL6.40 DW
BLK/BLK/DKC	40°	6W	F097022-5B CL6.40 DW
BLK/WH/BLK	40°	6W	F097022-1-1B CL6.40 DW
BLK/WH/WH	40°	6W	F097022-1-2B CL6.40 DW
BLK/WH/GLD	40°	6W	F097022-1-4B CL6.40 DW
BLK/WH/DKC	40°	6W	F097022-1-5B CL6.40 DW

HONEYCOMB D50


BS0298



1x COB LED max600lm 2200k up to 3000k



A A⁺ A⁺⁺



DALI DIMMABLE

WH/WH/WH	40°	6W	F097021D CL6.40 DW
WH/WH/BLK	40°	6W	F097021-2D CL6.40 DW
WH/WH/GLD	40°	6W	F097021-4D CL6.40 DW
WH/WH/DKC	40°	6W	F097021-5D CL6.40 DW
WH/BLK/BLK	40°	6W	F097021-2-2D CL6.40 DW
WH/BLK/WH	40°	6W	F097021-2-1D CL6.40 DW
WH/BLK/GLD	40°	6W	F097021-2-4D CL6.40 DW
WH/BLK/DKC	40°	6W	F097021-2-5D CL6.40 DW
BLK/BLK/BLK	40°	6W	F097022D CL6.40 DW
BLK/BLK/WH	40°	6W	F097022-1D CL6.40 DW
BLK/BLK/GLD	40°	6W	F097022-4D CL6.40 DW
BLK/BLK/DKC	40°	6W	F097022-5D CL6.40 DW
BLK/WH/BLK	40°	6W	F097022-1-1D CL6.40 DW
BLK/WH/WH	40°	6W	F097022-1-2D CL6.40 DW
BLK/WH/GLD	40°	6W	F097022-1-4D CL6.40 DW
BLK/WH/DKC	40°	6W	F097022-1-5D CL6.40 DW

HONEYCOMB D50

BS0298



tublr medium

48V track


TYPE 1



1x COB LED LENS max800lm 2700k



A A+ A++



NON DIMMABLE

WH/WH/WH	12°	9W	F097021A CL8_12	WW
WH/WH/BLK	12°	9W	F097021-2A CL8_12	WW
WH/WH/GLD	12°	9W	F097021-4A CL8_12	WW
WH/WH/DKC	12°	9W	F097021-5A CL8_12	WW
WH/BLK/BLK	12°	9W	F097021-2-2A CL8_12	WW
WH/BLK/WH	12°	9W	F097021-2-1A CL8_12	WW
WH/BLK/GLD	12°	9W	F097021-2-4A CL8_12	WW
WH/BLK/DKC	12°	9W	F097021-2-5A CL8_12	WW
BLK/BLK/BLK	12°	9W	F097022A CL8_12	WW
BLK/BLK/WH	12°	9W	F097022-1A CL8_12	WW
BLK/BLK/GLD	12°	9W	F097022-4A CL8_12	WW
BLK/BLK/DKC	12°	9W	F097022-5A CL8_12	WW
BLK/WH/WH	12°	9W	F097022-1-1A CL8_12	WW
BLK/WH/BLK	12°	9W	F097022-1-2A CL8_12	WW
BLK/WH/GLD	12°	9W	F097022-1-4A CL8_12	WW
BLK/WH/DKC	12°	9W	F097022-1-5A CL8_12	WW

1-10V DIMMABLE


WH/WH/WH	12°	9W	F097021B CL8_12	WW
WH/WH/BLK	12°	9W	F097021-2B CL8_12	WW
WH/WH/GLD	12°	9W	F097021-4B CL8_12	WW
WH/WH/DKC	12°	9W	F097021-5B CL8_12	WW
WH/BLK/BLK	12°	9W	F097021-2-2B CL8_12	WW
WH/BLK/WH	12°	9W	F097021-2-1B CL8_12	WW
WH/BLK/GLD	12°	9W	F097021-2-4B CL8_12	WW
WH/BLK/DKC	12°	9W	F097021-2-5B CL8_12	WW
BLK/BLK/BLK	12°	9W	F097022B CL8_12	WW
BLK/BLK/WH	12°	9W	F097022-1B CL8_12	WW
BLK/BLK/GLD	12°	9W	F097022-4B CL8_12	WW
BLK/BLK/DKC	12°	9W	F097022-5B CL8_12	WW
BLK/WH/WH	12°	9W	F097022-1-1B CL8_12	WW
BLK/WH/BLK	12°	9W	F097022-1-2B CL8_12	WW
BLK/WH/GLD	12°	9W	F097022-1-4B CL8_12	WW
BLK/WH/DKC	12°	9W	F097022-1-5B CL8_12	WW

ALTERNATIVE LIGHT COLOUR	REPLACE	WW	BY
WARM WHITE	2700K	WW	
NEUTRAL WHITE	3000K	NW	
MEDIUM WHITE	3500K	MW	
COLD WHITE	4000K	CW	


DIM-TO-WARM | Not available



1x COB LED LENS max800lm 2700k



A A+ A++



DALI DIMMABLE

WH/WH/WH	12°	9W	F097021D CL8_12	WW
WH/WH/BLK	12°	9W	F097021-2D CL8_12	WW
WH/WH/GLD	12°	9W	F097021-4D CL8_12	WW
WH/WH/DKC	12°	9W	F097021-5D CL8_12	WW
WH/BLK/BLK	12°	9W	F097021-2-2D CL8_12	WW
WH/BLK/WH	12°	9W	F097021-2-1D CL8_12	WW
WH/BLK/GLD	12°	9W	F097021-2-4D CL8_12	WW
WH/BLK/DKC	12°	9W	F097021-2-5D CL8_12	WW
BLK/BLK/BLK	12°	9W	F097022D CL8_12	WW
BLK/BLK/WH	12°	9W	F097022-1D CL8_12	WW
BLK/BLK/GLD	12°	9W	F097022-4D CL8_12	WW
BLK/BLK/DKC	12°	9W	F097022-5D CL8_12	WW
BLK/WH/WH	12°	9W	F097022-1-1D CL8_12	WW
BLK/WH/BLK	12°	9W	F097022-1-2D CL8_12	WW
BLK/WH/WH	12°	9W	F097022-1-4D CL8_12	WW
BLK/WH/DKC	12°	9W	F097022-1-5D CL8_12	WW



ALTERNATIVE LIGHT COLOUR REPLACE WW BY

WARM WHITE	2700K	WW
NEUTRAL WHITE	3000K	NW
MEDIUM WHITE	3500K	MW
COLD WHITE	4000K	CW


DIM-TO-WARM | Not available



1x **COB LED** max2000lm 2700k



A A⁺ A⁺⁺



NON DIMMABLE

WH/WH/WH	24°	17W	F097021A CL20_24 WW
WH/WH/BLK	24°	17W	F097021-2A CL20_24 WW
WH/WH/GLD	24°	17W	F097021-4A CL20_24 WW
WH/WH/DKC	24°	17W	F097021-5A CL20_24 WW
WH/BLK/BLK	24°	17W	F097021-2-2A CL20_24 WW
WH/BLK/WH	24°	17W	F097021-2-1A CL20_24 WW
WH/BLK/GLD	24°	17W	F097021-2-4A CL20_24 WW
WH/BLK/DKC	24°	17W	F097021-2-5A CL20_24 WW
BLK/BLK/BLK	24°	17W	F097022A CL20_24 WW
BLK/BLK/WH	24°	17W	F097022-1A CL20_24 WW
BLK/BLK/GLD	24°	17W	F097022-4A CL20_24 WW
BLK/BLK/DKC	24°	17W	F097022-5A CL20_24 WW
BLK/WH/WH	24°	17W	F097022-1-1A CL20_24 WW
BLK/WH/BLK	24°	17W	F097022-1-2A CL20_24 WW
BLK/WH/GLD	24°	17W	F097022-1-4A CL20_24 WW
BLK/WH/DKC	24°	17W	F097022-1-5A CL20_24 WW



1-10V DIMMABLE

WH/WH/WH	24°	17W	F097021B CL20_24 WW
WH/WH/BLK	24°	17W	F097021-2B CL20_24 WW
WH/WH/GLD	24°	17W	F097021-4B CL20_24 WW
WH/WH/DKC	24°	17W	F097021-5B CL20_24 WW
WH/BLK/BLK	24°	17W	F097021-2-2B CL20_24 WW
WH/BLK/WH	24°	17W	F097021-2-1B CL20_24 WW
WH/BLK/GLD	24°	17W	F097021-2-4B CL20_24 WW
WH/BLK/DKC	24°	17W	F097021-2-5B CL20_24 WW
BLK/BLK/BLK	24°	17W	F097022B CL20_24 WW
BLK/BLK/WH	24°	17W	F097022-1B CL20_24 WW
BLK/BLK/GLD	24°	17W	F097022-4B CL20_24 WW
BLK/BLK/DKC	24°	17W	F097022-5B CL20_24 WW
BLK/WH/WH	24°	17W	F097022-1-1B CL20_24 WW
BLK/WH/BLK	24°	17W	F097022-1-2B CL20_24 WW
BLK/WH/GLD	24°	17W	F097022-1-4B CL20_24 WW
BLK/WH/DKC	24°	17W	F097022-1-5B CL20_24 WW

HONEYCOMB D50

BS0298


ALTERNATIVE LIGHT COLOUR	REPLACE WW BY
WARM WHITE 2700K	WW
NEUTRAL WHITE 3000K	NW
MEDIUM WHITE 3500K	MW
COLD WHITE 4000K	CW

! 40° beam angle on request > ref=40

1x **COB LED** max2000lm 2700k



A A⁺ A⁺⁺



DALI DIMMABLE

WH/WH/WH	24°	17W	F097021D CL20_24 WW
WH/WH/BLK	24°	17W	F097021-2D CL20_24 WW
WH/WH/GLD	24°	17W	F097021-4D CL20_24 WW
WH/WH/DKC	24°	17W	F097021-5D CL20_24 WW
WH/BLK/BLK	24°	17W	F097021-2-2D CL20_24 WW
WH/BLK/WH	24°	17W	F097021-2-1D CL20_24 WW
WH/BLK/GLD	24°	17W	F097021-2-4D CL20_24 WW
WH/BLK/DKC	24°	17W	F097021-2-5D CL20_24 WW
BLK/BLK/BLK	24°	17W	F097022D CL20_24 WW
BLK/BLK/WH	24°	17W	F097022-1D CL20_24 WW
BLK/BLK/GLD	24°	17W	F097022-4D CL20_24 WW
BLK/BLK/DKC	24°	17W	F097022-5D CL20_24 WW
BLK/WH/BLK	24°	17W	F097022-1-1D CL20_24 WW
BLK/WH/WH	24°	17W	F097022-1-2D CL20_24 WW
BLK/WH/GLD	24°	17W	F097022-1-4D CL20_24 WW
BLK/WH/DKC	24°	17W	F097022-1-5D CL20_24 WW



HONEYCOMB D50

BS0298

ALTERNATIVE LIGHT COLOUR	REPLACE WW BY
WARM WHITE 2700K	WW
NEUTRAL WHITE 3000K	NW
MEDIUM WHITE 3500K	MW
COLD WHITE 4000K	CW

! 40° beam angle on request > ref=40

tublr medium

48V track


TYPE 2



1x COB LED max1200lm 2700k



A A+ A++



NON DIMMABLE

WH/WH/WH	24°	11W	F098021A CL10_24 WW
WH/WH/BLK	24°	11W	F098021-2A CL10_24 WW
WH/WH/GLD	24°	11W	F098021-4A CL10_24 WW
WH/WH/DKC	24°	11W	F098021-5A CL10_24 WW
WH/BLK/BLK	24°	11W	F098021-2-2A CL10_24 WW
WH/BLK/WH	24°	11W	F098021-2-1A CL10_24 WW
WH/BLK/GLD	24°	11W	F098021-2-4A CL10_24 WW
WH/BLK/DKC	24°	11W	F098021-2-5A CL10_24 WW
BLK/BLK/BLK	24°	11W	F098022A CL10_24 WW
BLK/BLK/WH	24°	11W	F098022-1A CL10_24 WW
BLK/BLK/GLD	24°	11W	F098022-4A CL10_24 WW
BLK/BLK/DKC	24°	11W	F098022-5A CL10_24 WW
BLK/WH/WH	24°	11W	F098022-1-1A CL10_24 WW
BLK/WH/BLK	24°	11W	F098022-1-2A CL10_24 WW
BLK/WH/GLD	24°	11W	F098022-1-4A CL10_24 WW
BLK/WH/DKC	24°	11W	F098022-1-5A CL10_24 WW

1-10V DIMMABLE

WH/WH/WH	24°	11W	F098021B CL10_24 WW
WH/WH/BLK	24°	11W	F098021-2B CL10_24 WW
WH/WH/GLD	24°	11W	F098021-4B CL10_24 WW
WH/WH/DKC	24°	11W	F098021-5B CL10_24 WW
WH/BLK/BLK	24°	11W	F098021-2-2B CL10_24 WW
WH/BLK/WH	24°	11W	F098021-2-1B CL10_24 WW
WH/BLK/GLD	24°	11W	F098021-2-4B CL10_24 WW
WH/BLK/DKC	24°	11W	F098021-2-5B CL10_24 WW
BLK/BLK/BLK	24°	11W	F098022B CL10_24 WW
BLK/BLK/WH	24°	11W	F098022-1B CL10_24 WW
BLK/BLK/GLD	24°	11W	F098022-4B CL10_24 WW
BLK/BLK/DKC	24°	11W	F098022-5B CL10_24 WW
BLK/WH/WH	24°	11W	F098022-1-1B CL10_24 WW
BLK/WH/BLK	24°	11W	F098022-1-2B CL10_24 WW
BLK/WH/GLD	24°	11W	F098022-1-4B CL10_24 WW
BLK/WH/DKC	24°	11W	F098022-1-5B CL10_24 WW

HONEYCOMB D50

BS0298


ALTERNATIVE LIGHT COLOUR	REPLACE WW BY
WARM WHITE	2700K WW
NEUTRAL WHITE	3000K NW
MEDIUM WHITE	3500K MW
COLD WHITE	4000K CW

! 40° beam angle on request > ref=40

1x COB LED max1200lm 2700k



A A+ A++



DALI DIMMABLE

WH/WH/WH	24°	11W	F098021D CL10_24 WW
WH/WH/BLK	24°	11W	F098021-2D CL10_24 WW
WH/WH/GLD	24°	11W	F098021-4D CL10_24 WW
WH/WH/DKC	24°	11W	F098021-5D CL10_24 WW
WH/BLK/BLK	24°	11W	F098021-2-2D CL10_24 WW
WH/BLK/WH	24°	11W	F098021-2-1D CL10_24 WW
WH/BLK/GLD	24°	11W	F098021-2-4D CL10_24 WW
WH/BLK/DKC	24°	11W	F098021-2-5D CL10_24 WW
BLK/BLK/BLK	24°	11W	F098022D CL10_24 WW
BLK/BLK/WH	24°	11W	F098022-1D CL10_24 WW
BLK/BLK/DKC	24°	11W	F098022-4D CL10_24 WW
BLK/BLK/GLD	24°	11W	F098022-5D CL10_24 WW
BLK/WH/BLK	24°	11W	F098022-1-1D CL10_24 WW
BLK/WH/WH	24°	11W	F098022-1-2D CL10_24 WW
BLK/WH/GLD	24°	11W	F098022-1-4D CL10_24 WW
BLK/WH/DKC	24°	11W	F098022-1-5D CL10_24 WW

HONEYCOMB D50

BS0298

ALTERNATIVE LIGHT COLOUR	REPLACE WW BY
WARM WHITE	2700K WW
NEUTRAL WHITE	3000K NW
MEDIUM WHITE	3500K MW
COLD WHITE	4000K CW


! 40° beam angle on request > ref=40



1x COB LED max600lm 2200k up to 3000k



A A⁺ A⁺⁺



1-10V DIMMABLE

WH/WH/WH	40°	6W	F098021B CL6.40 DW
WH/WH/BLK	40°	6W	F098021-2B CL6.40 DW
WH/WH/GLD	40°	6W	F098021-4B CL6.40 DW
WH/WH/DKC	40°	6W	F098021-5B CL6.40 DW
WH/BLK/BLK	40°	6W	F098021-2-2B CL6.40 DW
WH/BLK/WH	40°	6W	F098021-2-1B CL6.40 DW
WH/BLK/GLD	40°	6W	F098021-2-4B CL6.40 DW
WH/BLK/DKC	40°	6W	F098021-2-5B CL6.40 DW
BLK/BLK/BLK	40°	6W	F098022B CL6.40 DW
BLK/BLK/WH	40°	6W	F098022-1B CL6.40 DW
BLK/BLK/GLD	40°	6W	F098022-4B CL6.40 DW
BLK/BLK/DKC	40°	6W	F098022-5B CL6.40 DW
BLK/WH/BLK	40°	6W	F098022-1-1B CL6.40 DW
BLK/WH/WH	40°	6W	F098022-1-2B CL6.40 DW
BLK/WH/GLD	40°	6W	F098022-1-4B CL6.40 DW
BLK/WH/DKC	40°	6W	F098022-1-5B CL6.40 DW

HONEYCOMB D50


BS0298



1x COB LED max600lm 2200k up to 3000k



A A⁺ A⁺⁺



DALI DIMMABLE

WH/WH/WH	40°	6W	F098021D CL6.40 DW
WH/WH/BLK	40°	6W	F098021-2D CL6.40 DW
WH/WH/GLD	40°	6W	F098021-4D CL6.40 DW
WH/WH/DKC	40°	6W	F098021-5D CL6.40 DW
WH/BLK/BLK	40°	6W	F098021-2-2D CL6.40 DW
WH/BLK/WH	40°	6W	F098021-2-1D CL6.40 DW
WH/BLK/GLD	40°	6W	F098021-2-4D CL6.40 DW
WH/BLK/DKC	40°	6W	F098021-2-5D CL6.40 DW
BLK/BLK/BLK	40°	6W	F098022D CL6.40 DW
BLK/BLK/WH	40°	6W	F098022-1D CL6.40 DW
BLK/BLK/GLD	40°	6W	F098022-4D CL6.40 DW
BLK/BLK/DKC	40°	6W	F098022-5D CL6.40 DW
BLK/WH/BLK	40°	6W	F098022-1-1D CL6.40 DW
BLK/WH/WH	40°	6W	F098022-1-2D CL6.40 DW
BLK/WH/GLD	40°	6W	F098022-1-4D CL6.40 DW
BLK/WH/DKC	40°	6W	F098022-1-5D CL6.40 DW

HONEYCOMB D50

BS0298



tublr medium

48V track


TYPE 2



1x COB LED LENS max800lm 2700k



A A+ A++



NON DIMMABLE

WH/WH/WH	12°	9W	F098021A CL8_12 WW
WH/WH/BLK	12°	9W	F098021-2A CL8_12 WW
WH/WH/GLD	12°	9W	F098021-4A CL8_12 WW
WH/WH/DKC	12°	9W	F098021-5A CL8_12 WW
WH/BLK/BLK	12°	9W	F098021-2-2A CL8_12 WW
WH/BLK/WH	12°	9W	F098021-2-1A CL8_12 WW
WH/BLK/GLD	12°	9W	F098021-2-4A CL8_12 WW
WH/BLK/DKC	12°	9W	F098021-2-5A CL8_12 WW
BLK/BLK/BLK	12°	9W	F098022A CL8_12 WW
BLK/BLK/WH	12°	9W	F098022-1A CL8_12 WW
BLK/BLK/GLD	12°	9W	F098022-4A CL8_12 WW
BLK/BLK/DKC	12°	9W	F098022-5A CL8_12 WW
BLK/WH/WH	12°	9W	F098022-1-1A CL8_12 WW
BLK/WH/BLK	12°	9W	F098022-1-2A CL8_12 WW
BLK/WH/GLD	12°	9W	F098022-1-4A CL8_12 WW
BLK/WH/DKC	12°	9W	F098022-1-5A CL8_12 WW


1-10V DIMMABLE

WH/WH/WH	12°	9W	F098021B CL8_12 WW
WH/WH/BLK	12°	9W	F098021-2B CL8_12 WW
WH/WH/GLD	12°	9W	F098021-4B CL8_12 WW
WH/WH/DKC	12°	9W	F098021-5B CL8_12 WW
WH/BLK/BLK	12°	9W	F098021-2-2B CL8_12 WW
WH/BLK/WH	12°	9W	F098021-2-1B CL8_12 WW
WH/BLK/GLD	12°	9W	F098021-2-4B CL8_12 WW
WH/BLK/DKC	12°	9W	F098021-2-5B CL8_12 WW
BLK/BLK/BLK	12°	9W	F098022B CL8_12 WW
BLK/BLK/WH	12°	9W	F098022-1B CL8_12 WW
BLK/BLK/GLD	12°	9W	F098022-4B CL8_12 WW
BLK/BLK/DKC	12°	9W	F098022-5B CL8_12 WW
BLK/WH/WH	12°	9W	F098022-1-1B CL8_12 WW
BLK/WH/BLK	12°	9W	F098022-1-2B CL8_12 WW
BLK/WH/GLD	12°	9W	F098022-1-4B CL8_12 WW
BLK/WH/DKC	12°	9W	F098022-1-5B CL8_12 WW


ALTERNATIVE LIGHT COLOUR	REPLACE WW BY
WARM WHITE	2700K WW
NEUTRAL WHITE	3000K NW
MEDIUM WHITE	3500K MW
COLD WHITE	4000K CW

DIM-TO-WARM | Not available

1x COB LED LENS max800lm 2700k



A A+ A++



DALI DIMMABLE

WH/WH/WH	12°	9W	F098021D CL8_12 WW
WH/WH/BLK	12°	9W	F098021-2D CL8_12 WW
WH/WH/GLD	12°	9W	F098021-4D CL8_12 WW
WH/WH/DKC	12°	9W	F098021-5D CL8_12 WW
WH/BLK/BLK	12°	9W	F098021-2-2D CL8_12 WW
WH/BLK/WH	12°	9W	F098021-2-1D CL8_12 WW
WH/BLK/GLD	12°	9W	F098021-2-4D CL8_12 WW
WH/BLK/DKC	12°	9W	F098021-2-5D CL8_12 WW
BLK/BLK/BLK	12°	9W	F098022D CL8_12 WW
BLK/BLK/WH	12°	9W	F098022-1D CL8_12 WW
BLK/BLK/GLD	12°	9W	F098022-4D CL8_12 WW
BLK/BLK/DKC	12°	9W	F098022-5D CL8_12 WW
BLK/WH/WH	12°	9W	F098022-1-1D CL8_12 WW
BLK/WH/BLK	12°	9W	F098022-1-2D CL8_12 WW
BLK/WH/GLD	12°	9W	F098022-1-4D CL8_12 WW
BLK/WH/DKC	12°	9W	F098022-1-5D CL8_12 WW

ALTERNATIVE LIGHT COLOUR REPLACE WW BY

WARM WHITE	2700K	WW
NEUTRAL WHITE	3000K	NW
MEDIUM WHITE	3500K	MW
COLD WHITE	4000K	CW

DIM-TO-WARM | Not available






1x COB LED max2000lm 2700k



A A+ A++



NON DIMMABLE

WH/WH/WH	24°	17W	F098021A CL20_24 WW
WH/WH/BLK	24°	17W	F098021-2A CL20_24 WW
WH/WH/GLD	24°	17W	F098021-4A CL20_24 WW
WH/WH/DKC	24°	17W	F098021-5A CL20_24 WW
WH/BLK/BLK	24°	17W	F098021-2-2A CL20_24 WW
WH/BLK/WH	24°	17W	F098021-2-1A CL20_24 WW
WH/BLK/GLD	24°	17W	F098021-2-4A CL20_24 WW
WH/BLK/DKC	24°	17W	F098021-2-5A CL20_24 WW
BLK/BLK/BLK	24°	17W	F098022A CL20_24 WW
BLK/BLK/WH	24°	17W	F098022-1A CL20_24 WW
BLK/BLK/GLD	24°	17W	F098022-4A CL20_24 WW
BLK/BLK/DKC	24°	17W	F098022-5A CL20_24 WW
BLK/WH/WH	24°	17W	F098022-1-1A CL20_24 WW
BLK/WH/BLK	24°	17W	F098022-1-2A CL20_24 WW
BLK/WH/GLD	24°	17W	F098022-1-4A CL20_24 WW
BLK/WH/DKC	24°	17W	F098022-1-5A CL20_24 WW

1-10V DIMMABLE

WH/WH/WH	24°	17W	F098021B CL20_24 WW
WH/WH/BLK	24°	17W	F098021-2B CL20_24 WW
WH/WH/GLD	24°	17W	F098021-4B CL20_24 WW
WH/WH/DKC	24°	17W	F098021-5B CL20_24 WW
WH/BLK/BLK	24°	17W	F098021-2-2B CL20_24 WW
WH/BLK/WH	24°	17W	F098021-2-1B CL20_24 WW
WH/BLK/GLD	24°	17W	F098021-2-4B CL20_24 WW
WH/BLK/DKC	24°	17W	F098021-2-5B CL20_24 WW
BLK/BLK/BLK	24°	17W	F098022B CL20_24 WW
BLK/BLK/WH	24°	17W	F098022-1B CL20_24 WW
BLK/BLK/GLD	24°	17W	F098022-4B CL20_24 WW
BLK/BLK/DKC	24°	17W	F098022-5B CL20_24 WW
BLK/WH/WH	24°	17W	F098022-1-1B CL20_24 WW
BLK/WH/BLK	24°	17W	F098022-1-2B CL20_24 WW
BLK/WH/GLD	24°	17W	F098022-1-4B CL20_24 WW
BLK/WH/DKC	24°	17W	F098022-1-5B CL20_24 WW

HONEYCOMB D50

BS0298


ALTERNATIVE LIGHT COLOUR	REPLACE WW	BY
WARM WHITE	2700K	WW
NEUTRAL WHITE	3000K	NW
MEDIUM WHITE	3500K	MW
COLD WHITE	4000K	CW

! 40° beam angle on request > ref=40

1x COB LED max2000lm 2700k



A A+ A++



DALI DIMMABLE

WH/WH/WH	24°	17W	F098021D CL20_24 WW
WH/WH/BLK	24°	17W	F098021-2D CL20_24 WW
WH/WH/GLD	24°	17W	F098021-4D CL20_24 WW
WH/WH/DKC	24°	17W	F098021-5D CL20_24 WW
WH/BLK/BLK	24°	17W	F098021-2-2D CL20_24 WW
WH/BLK/WH	24°	17W	F098021-2-1D CL20_24 WW
WH/BLK/GLD	24°	17W	F098021-2-4D CL20_24 WW
WH/BLK/DKC	24°	17W	F098021-2-5D CL20_24 WW
BLK/BLK/BLK	24°	17W	F098022D CL20_24 WW
BLK/BLK/WH	24°	17W	F098022-1D CL20_24 WW
BLK/BLK/GLD	24°	17W	F098022-4D CL20_24 WW
BLK/BLK/DKC	24°	17W	F098022-5D CL20_24 WW
BLK/WH/WH	24°	17W	F098022-1-1D CL20_24 WW
BLK/WH/BLK	24°	17W	F098022-1-2D CL20_24 WW
BLK/WH/WH	24°	17W	F098022-1-4D CL20_24 WW
BLK/WH/DKC	24°	17W	F098022-1-5D CL20_24 WW

HONEYCOMB D50

BS0298

ALTERNATIVE LIGHT COLOUR	REPLACE WW	BY
WARM WHITE	2700K	WW
NEUTRAL WHITE	3000K	NW
MEDIUM WHITE	3500K	MW
COLD WHITE	4000K	CW

! 40° beam angle on request > ref=40

tublr mini

48V track


TYPE 1



1x COB LED max1200lm 2700k



A A+ A++



NON DIMMABLE

WH/WH/WH	24°	10W	F097031A CL10_24 WW
WH/WH/BLK	24°	10W	F097031-2A CL10_24 WW
WH/WH/GLD	24°	10W	F097031-4A CL10_24 WW
WH/WH/DKC	24°	10W	F09W7031-5A CL10_24 WW
WH/BLK/BLK	24°	10W	F097031-2-2A CL10_24 WW
WH/BLK/WH	24°	10W	F097031-2-1A CL10_24 WW
WH/BLK/GLD	24°	10W	F097031-2-4A CL10_24 WW
WH/BLK/DKC	24°	10W	F097031-2-5A CL10_24 WW
BLK/BLK/BLK	24°	10W	F097032A CL10_24 WW
BLK/BLK/WH	24°	10W	F097032-1A CL10_24 WW
BLK/BLK/DKC	24°	10W	F097032-4A CL10_24 WW
BLK/BLK/GLD	24°	10W	F097032-5A CL10_24 WW
BLK/WH/WH	24°	10W	F097032-1-1A CL10_24 WW
BLK/WH/BLK	24°	10W	F097032-1-2A CL10_24 WW
BLK/WH/GLD	24°	10W	F097032-1-4A CL10_24 WW
BLK/WH/DKC	24°	10W	F097032-1-5A CL10_24 WW



1-10V DIMMABLE

WH/WH/WH	24°	10W	F097031B CL10_24 WW
WH/WH/BLK	24°	10W	F097031-2B CL10_24 WW
WH/WH/GLD	24°	10W	F097031-4B CL10_24 WW
WH/WH/DKC	24°	10W	F09W7031-5B CL10_24 WW
WH/BLK/BLK	24°	10W	F097031-2-2B CL10_24 WW
WH/BLK/WH	24°	10W	F097031-2-1B CL10_24 WW
WH/BLK/GLD	24°	10W	F097031-2-4B CL10_24 WW
WH/BLK/DKC	24°	10W	F097031-2-5B CL10_24 WW
BLK/BLK/BLK	24°	10W	F097032B CL10_24 WW
BLK/BLK/WH	24°	10W	F097032-1B CL10_24 WW
BLK/BLK/DKC	24°	10W	F097032-4B CL10_24 WW
BLK/BLK/GLD	24°	10W	F097032-5B CL10_24 WW
BLK/WH/WH	24°	10W	F097032-1-1B CL10_24 WW
BLK/WH/BLK	24°	10W	F097032-1-2B CL10_24 WW
BLK/WH/GLD	24°	10W	F097032-1-4B CL10_24 WW
BLK/WH/DKC	24°	10W	F097032-1-5B CL10_24 WW


ALTERNATIVE LIGHT COLOUR	REPLACE WW BY
WARM WHITE	2700K WW
NEUTRAL WHITE	3000K NW
MEDIUM WHITE	3500K MW
COLD WHITE	4000K CW

! 40° beam angle available on request > ref=...40

1x COB LED max1200lm 2700k



A A+ A++



DALI DIMMABLE

WH/WH/WH	24°	10W	F097031D CL10_24 WW
WH/WH/BLK	24°	10W	F097031-2D CL10_24 WW
WH/WH/GLD	24°	10W	F097031-4D CL10_24 WW
WH/WH/DKC	24°	10W	F097031-5D CL10_24 WW
WH/BLK/BLK	24°	10W	F097031-2-2D CL10_24 WW
WH/BLK/WH	24°	10W	F097031-2-1D CL10_24 WW
WH/BLK/GLD	24°	10W	F097031-2-4D CL10_24 WW
WH/BLK/DKC	24°	10W	F097031-2-5D CL10_24 WW
BLK/BLK/BLK	24°	10W	F097032D CL10_24 WW
BLK/BLK/WH	24°	10W	F097032-1D CL10_24 WW
BLK/BLK/DKC	24°	10W	F097032-4D CL10_24 WW
BLK/BLK/GLD	24°	10W	F097032-5D CL10_24 WW
BLK/WH/WH	24°	10W	F097032-1-1D CL10_24 WW
BLK/WH/BLK	24°	10W	F097032-1-2D CL10_24 WW
BLK/WH/GLD	24°	10W	F097032-1-4D CL10_24 WW
BLK/WH/DKC	24°	10W	F097032-1-5D CL10_24 WW



ALTERNATIVE LIGHT COLOUR	REPLACE WW BY
WARM WHITE	2700K WW
NEUTRAL WHITE	3000K NW
MEDIUM WHITE	3500K MW
COLD WHITE	4000K CW


! 40° beam angle available on request > ref=...40



1x COB LED max600lm 2200k up to 3000k



A A+ A++



1-10V DIMMABLE


WH/WH/WH	40°	6W	F097031B CL6_40 DW
WH/WH/BLK	40°	6W	F097031-2B CL6_40 DW
WH/WH/GLD	40°	6W	F097031-4B CL6_40 DW
WH/WH/DKC	40°	6W	F097031-5B CL6_40 DW
WH/BLK/BLK	40°	6W	F097031-2-2B CL6_40 DW
WH/BLK/WH	40°	6W	F097031-2-1B CL6_40 DW
WH/BLK/GLD	40°	6W	F097031-2-4B CL6_40 DW
WH/BLK/DKC	40°	6W	F097031-2-5B CL6_40 DW
BLK/BLK/BLK	40°	6W	F097032B CL6_40 DW
BLK/BLK/WH	40°	6W	F097032-1B CL6_40 DW
BLK/BLK/GLD	40°	6W	F097032-4B CL6_40 DW
BLK/BLK/DKC	40°	6W	F097032-5B CL6_40 DW
BLK/WH/WH	40°	6W	F097032-1-1B CL6_40 DW
BLK/WH/BLK	40°	6W	F097032-1-2B CL6_40 DW
BLK/WH/GLD	40°	6W	F097032-1-4B CL6_40 DW
BLK/WH/DKC	40°	6W	F097032-1-5B CL6_40 DW



1x COB LED max600lm 2200k up to 3000k



A A+ A++



DALI DIMMABLE

WH/WH/WH	40°	6W	F097031D CL6_40 DW
WH/WH/BLK	40°	6W	F097031-2D CL6_40 DW
WH/WH/GLD	40°	6W	F097031-4D CL6_40 DW
WH/WH/DKC	40°	6W	F097031-5D CL6_40 DW
WH/BLK/BLK	40°	6W	F097031-2-2D CL6_40 DW
WH/BLK/WH	40°	6W	F097031-2-1D CL6_40 DW
WH/BLK/GLD	40°	6W	F097031-2-4D CL6_40 DW
WH/BLK/DKC	40°	6W	F097031-2-5D CL6_40 DW
BLK/BLK/BLK	40°	6W	F097032D CL6_40 DW
BLK/BLK/WH	40°	6W	F097032-1D CL6_40 DW
BLK/BLK/GLD	40°	6W	F097032-4D CL6_40 DW
BLK/BLK/DKC	40°	6W	F097032-5D CL6_40 DW
BLK/WH/WH	40°	6W	F097032-1-1D CL6_40 DW
BLK/WH/BLK	40°	6W	F097032-1-2D CL6_40 DW
BLK/WH/GLD	40°	6W	F097032-1-4D CL6_40 DW
BLK/WH/DKC	40°	6W	F097032-1-5D CL6_40 DW



tublr mini

48V track


TYPE 1



1x **COB LED** max1200lm 2700k



A A+ A++



WITH DIMMING KNOB

BLK/BLK/BLK	24°	10W	F097032P CL10_24 WW
BLK/BLK/WH	24°	10W	F097032-1P CL10_24 WW
BLK/BLK/GLD	24°	10W	F097032-4P CL10_24 WW
BLK/BLK/DKC	24°	10W	F097032-5P CL10_24 WW
BLK/WH/WH	24°	10W	F097032-1-1P CL10_24 WW
BLK/WH/BLK	24°	10W	F097032-1-2P CL10_24 WW
BLK/WH/GLD	24°	10W	F097032-1-4P CL10_24 WW
BLK/WH/DKC	24°	10W	F097032-1-5P CL10_24 WW

ALTERNATIVE LIGHT COLOUR	REPLACE WW BY
WARM WHITE	2700K WW
NEUTRAL WHITE	3000K NW
MEDIUM WHITE	3500K MW
COLD WHITE	4000K CW


! 40° beam angle available on request > ref=...40

CRI 90+	SDCM < 3	SO 900lm
DLI	5 YEAR WARRANTY	0.5m
360°	95°	0.6 kg
passive	LM80 50000	

1x **COB LED** max6001m 2200k up to 3000k



A A+ A++



WITH DIMMING KNOB

BLK/BLK/BLK	40°	6W	F097032P CL6_40 DW
BLK/BLK/WH	40°	6W	F097032-1P CL6_40 DW
BLK/BLK/GLD	40°	6W	F097032-4P CL6_40 DW
BLK/BLK/DKC	40°	6W	F097032-5P CL6_40 DW
BLK/WH/WH	40°	6W	F097032-1-1P CL6_40 DW
BLK/WH/BLK	40°	6W	F097032-1-2P CL6_40 DW
BLK/WH/GLD	40°	6W	F097032-1-4P CL6_40 DW
BLK/WH/DKC	40°	6W	F097032-1-5P CL6_40 DW

CRI 90+	SDCM < 3	SO 540lm
DLI	5 YEAR WARRANTY	0.5m
360°	95°	0.6 kg
passive	LM80 50000	




TYPE 2



1x **COB LED** max1200lm 2700k



A A⁺ A⁺⁺



NON DIMMABLE

WH/WH/WH	24°	10W	F098031A CL10_24 WW
WH/WH/BLK	24°	10W	F098031-2A CL10_24 WW
WH/WH/GLD	24°	10W	F098031-4A CL10_24 WW
WH/WH/DKC	24°	10W	F098031-5A CL10_24 WW
WH/BLK/BLK	24°	10W	F098031-2-2A CL10_24 WW
WH/BLK/WH	24°	10W	F098031-2-1A CL10_24 WW
WH/BLK/GLD	24°	10W	F098031-2-4A CL10_24 WW
WH/BLK/DKC	24°	10W	F098031-2-5A CL10_24 WW
BLK/BLK/BLK	24°	10W	F098032A CL10_24 WW
BLK/BLK/WH	24°	10W	F098032-1A CL10_24 WW
BLK/BLK/GLD	24°	10W	F098032-4A CL10_24 WW
BLK/BLK/DKC	24°	10W	F098032-5A CL10_24 WW
BLK/WH/WH	24°	10W	F098032-1-1A CL10_24 WW
BLK/WH/BLK	24°	10W	F098032-1-2A CL10_24 WW
BLK/WH/GLD	24°	10W	F098032-1-4A CL10_24 WW
BLK/WH/DKC	24°	10W	F098032-1-5A CL10_24 WW



1-10V DIMMABLE

WH/WH/WH	24°	10W	F098031B CL10_24 WW
WH/WH/BLK	24°	10W	F098031-2B CL10_24 WW
WH/WH/GLD	24°	10W	F098031-4B CL10_24 WW
WH/WH/DKC	24°	10W	F098031-5B CL10_24 WW
WH/BLK/BLK	24°	10W	F098031-2-2B CL10_24 WW
WH/BLK/WH	24°	10W	F098031-2-1B CL10_24 WW
WH/BLK/GLD	24°	10W	F098031-2-4B CL10_24 WW
WH/BLK/DKC	24°	10W	F098031-2-5B CL10_24 WW
BLK/BLK/BLK	24°	10W	F098032B CL10_24 WW
BLK/BLK/WH	24°	10W	F098032-1B CL10_24 WW
BLK/BLK/GLD	24°	10W	F098032-4B CL10_24 WW
BLK/BLK/DKC	24°	10W	F098032-5B CL10_24 WW
BLK/WH/WH	24°	10W	F098032-1-1B CL10_24 WW
BLK/WH/BLK	24°	10W	F098032-1-2B CL10_24 WW
BLK/WH/GLD	24°	10W	F098032-1-4B CL10_24 WW
BLK/WH/DKC	24°	10W	F098032-1-5B CL10_24 WW


ALTERNATIVE LIGHT COLOUR	REPLACE WW BY
WARM WHITE	2700K WW
NEUTRAL WHITE	3000K NW
MEDIUM WHITE	3500K MW
COLD WHITE	4000K CW

! 40° beam angle available on request > ref=...40

1x **COB LED** max1200lm 2700k



A A⁺ A⁺⁺



DALI DIMMABLE

WH/WH/WH	24°	10W	F098031D CL10_24 WW
WH/WH/BLK	24°	10W	F098031-2D CL10_24 WW
WH/WH/GLD	24°	10W	F098031-4D CL10_24 WW
WH/WH/DKC	24°	10W	F098031-5D CL10_24 WW
WH/BLK/BLK	24°	10W	F098031-2-2D CL10_24 WW
WH/BLK/WH	24°	10W	F098031-2-1D CL10_24 WW
WH/BLK/GLD	24°	10W	F098031-2-4D CL10_24 WW
WH/BLK/DKC	24°	10W	F098031-2-5D CL10_24 WW
BLK/BLK/BLK	24°	10W	F098032D CL10_24 WW
BLK/BLK/WH	24°	10W	F098032-1D CL10_24 WW
BLK/BLK/GLD	24°	10W	F098032-4D CL10_24 WW
BLK/BLK/DKC	24°	10W	F098032-5D CL10_24 WW
BLK/WH/WH	24°	10W	F098032-1-1D CL10_24 WW
BLK/WH/BLK	24°	10W	F098032-1-2D CL10_24 WW
BLK/WH/GLD	24°	10W	F098032-1-4D CL10_24 WW
BLK/WH/DKC	24°	10W	F098032-1-5D CL10_24 WW



ALTERNATIVE LIGHT COLOUR	REPLACE WW BY
WARM WHITE	2700K WW
NEUTRAL WHITE	3000K NW
MEDIUM WHITE	3500K MW
COLD WHITE	4000K CW

! 40° beam angle available on request > ref=...40

tublr mini

48V track


TYPE 2



1x COB LED max600lm 2200k up to 3000k




A A+ A++



1x COB LED max600lm 2200k up to 3000k



A A+ A++



1-10V DIMMABLE

WH/WH/WH	40°	6W	F098031B CL6_40 DW
WH/WH/BLK	40°	6W	F098031-2B CL6_40 DW
WH/WH/GLD	40°	6W	F098031-4B CL6_40 DW
WH/WH/DKC	40°	6W	F098031-5B CL6_40 DW
WH/BLK/BLK	40°	6W	F098031-2-2B CL6_40 DW
WH/BLK/WH	40°	6W	F098031-2-1B CL6_40 DW
WH/BLK/GLD	40°	6W	F098031-2-4B CL6_40 DW
WH/BLK/DKC	40°	6W	F098031-2-5B CL6_40 DW
BLK/BLK/BLK	40°	6W	F098032B CL6_40 DW
BLK/BLK/WH	40°	6W	F098032-1B CL6_40 DW
BLK/BLK/GLD	40°	6W	F098032-4B CL6_40 DW
BLK/BLK/DKC	40°	6W	F098032-5B CL6_40 DW
BLK/WH/WH	40°	6W	F098032-1-1B CL6_40 DW
BLK/WH/BLK	40°	6W	F098032-1-2B CL6_40 DW
BLK/WH/GLD	40°	6W	F098032-1-4B CL6_40 DW
BLK/WH/DKC	40°	6W	F098032-1-5B CL6_40 DW



DALI DIMMABLE

WH/WH/WH	40°	6W	F098031D CL6_40 DW
WH/WH/BLK	40°	6W	F098031-2D CL6_40 DW
WH/WH/GLD	40°	6W	F098031-4D CL6_40 DW
WH/WH/DKC	40°	6W	F098031-5D CL6_40 DW
WH/BLK/BLK	40°	6W	F098031-2-2D CL6_40 DW
WH/BLK/WH	40°	6W	F098031-2-1D CL6_40 DW
WH/BLK/GLD	40°	6W	F098031-2-4D CL6_40 DW
WH/BLK/DKC	40°	6W	F098031-2-5D CL6_40 DW
BLK/BLK/BLK	40°	6W	F098032D CL6_40 DW
BLK/BLK/WH	40°	6W	F098032-1D CL6_40 DW
BLK/BLK/GLD	40°	6W	F098032-4D CL6_40 DW
BLK/BLK/DKC	40°	6W	F098032-5D CL6_40 DW
BLK/WH/WH	40°	6W	F098032-1-1D CL6_40 DW
BLK/WH/BLK	40°	6W	F098032-1-2D CL6_40 DW
BLK/WH/GLD	40°	6W	F098032-1-4D CL6_40 DW
BLK/WH/DKC	40°	6W	F098032-1-5D CL6_40 DW






1x **COB LED** max1200lm 2700k



A A⁺ A⁺⁺



WITH DIMMING KNOB

BLK/BLK/BLK	24°	10W	F098032P CL10_24 WW
BLK/BLK/WH	24°	10W	F098032-1P CL10_24 WW
BLK/BLK/GLD	24°	10W	F098032-4P CL10_24 WW
BLK/BLK/DKC	24°	10W	F098032-5P CL10_24 WW
BLK/WH/WH	24°	10W	F098032-1-1P CL10_24 WW
BLK/WH/BLK	24°	10W	F098032-1-2P CL10_24 WW
BLK/WH/GLD	24°	10W	F098032-1-4P CL10_24 WW
BLK/WH/DKC	24°	10W	F098032-1-5P CL10_24 WW

ALTERNATIVE LIGHT COLOUR	REPLACE WW BY
WARM WHITE	2700K WW
NEUTRAL WHITE	3000K NW
MEDIUM WHITE	3500K MW
COLD WHITE	4000K CW


! 40° beam angle available on request > ref=...40



1x **COB LED** max600lm 2200k up to 3000k



A A⁺ A⁺⁺



WITH DIMMING KNOB

BLK/BLK/BLK	40°	6W	F098032P CL6_40 DW
BLK/BLK/WH	40°	6W	F098032-1P CL6_40 DW
BLK/BLK/GLD	40°	6W	F098032-4P CL6_40 DW
BLK/BLK/DKC	40°	6W	F098032-5P CL6_40 DW
BLK/WH/WH	40°	6W	F098032-1-1P CL6_40 DW
BLK/WH/BLK	40°	6W	F098032-1-2P CL6_40 DW
BLK/WH/GLD	40°	6W	F098032-1-4P CL6_40 DW
BLK/WH/DKC	40°	6W	F098032-1-5P CL6_40 DW



tubed suspension


48V track



1x COB LED max 1200lm 2700k



A A+ A++



NON DIMMABLE

WH/WH/WH	24°	10W	F097301A CL10_24 WW
WH/WH/BLK	24°	10W	F097301-2A CL10_24 WW
WH/WH/GLD	24°	10W	F097301-4A CL10_24 WW
WH/WH/DKC	24°	10W	F097301-5A CL10_24 WW
WH/BLK/BLK	24°	10W	F097301-2-2A CL10_24 WW
WH/BLK/WH	24°	10W	F097301-2-1A CL10_24 WW
WH/BLK/GLD	24°	10W	F097301-2-4A CL10_24 WW
WH/BLK/DKC	24°	10W	F097301-2-5A CL10_24 WW
BLK/BLK/BLK	24°	10W	F097302A CL10_24 WW
BLK/BLK/WH	24°	10W	F097302-1A CL10_24 WW
BLK/BLK/GLD	24°	10W	F097302-4A CL10_24 WW
BLK/BLK/DKC	24°	10W	F097302-5A CL10_24 WW
BLK/WH/WH	24°	10W	F097302-1-1A CL10_24 WW
BLK/WH/BLK	24°	10W	F097302-1-2A CL10_24 WW
BLK/WH/GLD	24°	10W	F097302-1-4A CL10_24 WW
BLK/WH/DKC	24°	10W	F097302-1-5A CL10_24 WW

1-10V DIMMABLE

WH/WH/WH	24°	10W	F097301B CL10_24 WW
WH/WH/BLK	24°	10W	F097301-2B CL10_24 WW
WH/WH/GLD	24°	10W	F097301-4B CL10_24 WW
WH/WH/DKC	24°	10W	F097301-5B CL10_24 WW
WH/BLK/BLK	24°	10W	F097301-2-2B CL10_24 WW
WH/BLK/WH	24°	10W	F097301-2-1B CL10_24 WW
WH/BLK/GLD	24°	10W	F097301-2-4B CL10_24 WW
WH/BLK/DKC	24°	10W	F097301-2-5B CL10_24 WW
BLK/BLK/BLK	24°	10W	F097302B CL10_24 WW
BLK/BLK/WH	24°	10W	F097302-1B CL10_24 WW
BLK/BLK/GLD	24°	10W	F097302-4B CL10_24 WW
BLK/BLK/DKC	24°	10W	F097302-5B CL10_24 WW
BLK/WH/WH	24°	10W	F097302-1-1B CL10_24 WW
BLK/WH/BLK	24°	10W	F097302-1-2B CL10_24 WW
BLK/WH/GLD	24°	10W	F097302-1-4B CL10_24 WW
BLK/WH/DKC	24°	10W	F097302-1-5B CL10_24 WW

HONEYCOMB D50


BS0298

ALTERNATIVE LIGHT COLOUR REPLACE WW BY


WARM WHITE	2700K	WW
NEUTRAL WHITE	3000K	NW
MEDIUM WHITE	3500K	MW
COLD WHITE	4000K	CW

! 40° beam angle available on request > ref=...40

1x COB LED max 1200lm 2700k



A A+ A++



DALI DIMMABLE

WH/WH/WH	24°	10W	F097301D CL10_24 WW
WH/WH/BLK	24°	10W	F097301-2D CL10_24 WW
WH/WH/GLD	24°	10W	F097301-4D CL10_24 WW
WH/WH/DKC	24°	10W	F097301-5D CL10_24 WW
WH/BLK/BLK	24°	10W	F097301-2-2D CL10_24 WW
WH/BLK/WH	24°	10W	F097301-2-1D CL10_24 WW
WH/BLK/GLD	24°	10W	F097301-2-4D CL10_24 WW
WH/BLK/DKC	24°	10W	F097301-2-5D CL10_24 WW
BLK/BLK/BLK	24°	10W	F097302D CL10_24 WW
BLK/BLK/WH	24°	10W	F097302-1D CL10_24 WW
BLK/BLK/GLD	24°	10W	F097302-4D CL10_24 WW
BLK/BLK/DKC	24°	10W	F097302-5D CL10_24 WW
BLK/WH/WH	24°	10W	F097302-1-1D CL10_24 WW
BLK/WH/BLK	24°	10W	F097302-1-2D CL10_24 WW
BLK/WH/GLD	24°	10W	F097302-1-4D CL10_24 WW
BLK/WH/DKC	24°	10W	F097302-1-5D CL10_24 WW

HONEYCOMB D50

BS0298

ALTERNATIVE LIGHT COLOUR REPLACE WW BY

WARM WHITE	2700K	WW
NEUTRAL WHITE	3000K	NW
MEDIUM WHITE	3500K	MW
COLD WHITE	4000K	CW


! 40° beam angle available on request > ref=...40



1x COB LED max 600lm 2200k up to 3000k



A A+ A++



1-10V DIMMABLE

WH/WH/WH	40°	6W	F097301B CL6_40 DW
WH/WH/BLK	40°	6W	F097301-2B CL6_40 DW
WH/WH/GLD	40°	6W	F097301-4B CL6_40 DW
WH/WH/DKC	40°	6W	F097301-5B CL6_40 DW
WH/BLK/BLK	40°	6W	F097301-2-2B CL6_40 DW
WH/BLK/WH	40°	6W	F097301-2-1B CL6_40 DW
WH/BLK/GLD	40°	6W	F097301-2-4B CL6_40 DW
WH/BLK/DKC	40°	6W	F097301-2-5B CL6_40 DW
BLK/BLK/BLK	40°	6W	F097302B CL6_40 DW
BLK/BLK/WH	40°	6W	F097302-1B CL6_40 DW
BLK/BLK/GLD	40°	6W	F097302-4B CL6_40 DW
BLK/BLK/DKC	40°	6W	F097302-5B CL6_40 DW
BLK/WH/BLK	40°	6W	F097302-1-1B CL6_40 DW
BLK/WH/WH	40°	6W	F097302-1-2B CL6_40 DW
BLK/WH/GLD	40°	6W	F097302-1-4B CL6_40 DW
BLK/WH/DKC	40°	6W	F097302-1-5B CL6_40 DW

HONEYCOMB D50


BS0298



1x COB LED max 600lm 2200k up to 3000k



A A+ A++



DALI DIMMABLE

WH/WH/WH	40°	6W	F097301D CL6_40 DW
WH/WH/BLK	40°	6W	F097301-2D CL6_40 DW
WH/WH/GLD	40°	6W	F097301-4D CL6_40 DW
WH/WH/DKC	40°	6W	F097301-5D CL6_40 DW
WH/BLK/BLK	40°	6W	F097301-2-2D CL6_40 DW
WH/BLK/WH	40°	6W	F097301-2-1D CL6_40 DW
WH/BLK/GLD	40°	6W	F097301-2-4D CL6_40 DW
WH/BLK/DKC	40°	6W	F097301-2-5D CL6_40 DW
BLK/BLK/BLK	40°	6W	F097302D CL6_40 DW
BLK/BLK/WH	40°	6W	F097302-1D CL6_40 DW
BLK/BLK/GLD	40°	6W	F097302-4D CL6_40 DW
BLK/BLK/DKC	40°	6W	F097302-5D CL6_40 DW
BLK/WH/BLK	40°	6W	F097302-1-1D CL6_40 DW
BLK/WH/WH	40°	6W	F097302-1-2D CL6_40 DW
BLK/WH/GLD	40°	6W	F097302-1-4D CL6_40 DW
BLK/WH/DKC	40°	6W	F097302-1-5D CL6_40 DW


HONEYCOMB D50

BS0298



traxx mini


48V track

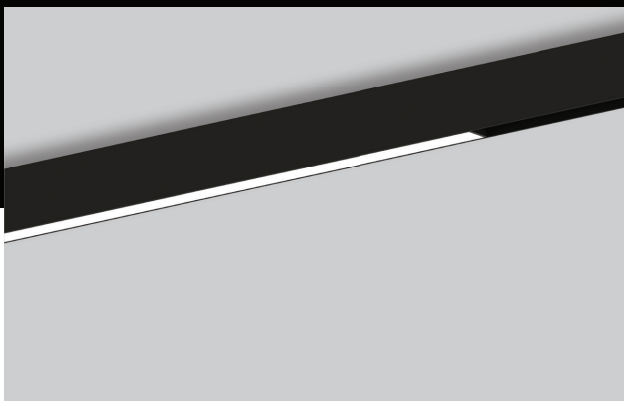

1x **LEDLINE** max 700lm 2700K

new

A A⁺ A⁺⁺



NON DIMMABLE		
BLK 60° 6W	F097302A LL7_60 WW	
1-10V DIMMABLE		
BLK 60° 6W	F097302B LL7_60 WW	
DALI DIMMABLE		
BLK 60° 6W	F097302D LL7_60 WW	


ALTERNATIVE LIGHT COLOUR	REPLACE WW BY
WARM WHITE 2700K	WW
NEUTRAL WHITE 3000K	NW
COLD WHITE 4000K	CW



1x **LEDLINE** max 2200lm 2700K

new

A A⁺ A⁺⁺



NON DIMMABLE		
BLK 60° 18W	F097322A LL22_60 WW	
1-10V DIMMABLE		
BLK 60° 18W	F097322B LL22_60 WW	
DALI DIMMABLE		
BLK 60° 18W	F097322D LL22_60 WW	


ALTERNATIVE LIGHT COLOUR	REPLACE WW BY
WARM WHITE 2700K	WW
NEUTRAL WHITE 3000K	NW
COLD WHITE 4000K	CW



1x **LEDLINE** max 1500lm 2700K

new

A A⁺ A⁺⁺



NON DIMMABLE		
BLK 60° 12W	F097312A LL15_60 WW	
1-10V DIMMABLE		
BLK 60° 12W	F097312B LL15_60 WW	
DALI DIMMABLE		
BLK 60° 12W	F097312D LL15_60 WW	


ALTERNATIVE LIGHT COLOUR	REPLACE WW BY
WARM WHITE 2700K	WW
NEUTRAL WHITE 3000K	NW
COLD WHITE 4000K	CW



1x **LEDLINE** max 3000lm 2700K

new

A A⁺ A⁺⁺

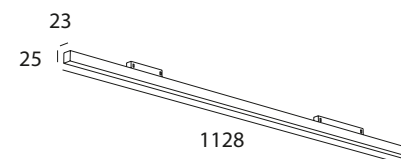

NON DIMMABLE		
BLK 60° 24W	F097332A LL30_60 WW	
1-10V DIMMABLE		
BLK 60° 24W	F097332B LL30_60 WW	
DALI DIMMABLE		
BLK 60° 24W	F097332D LL30_60 WW	


ALTERNATIVE LIGHT COLOUR	REPLACE WW BY
WARM WHITE 2700K	WW
NEUTRAL WHITE 3000K	NW
COLD WHITE 4000K	CW





1x **LEDLINE** max 3600lm 2700K 

A A+ A++

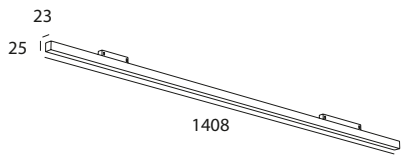



- NON DIMMABLE**
BLK | 60° | 30W | F097342A LL36_60 **WW** |
- 1-10V DIMMABLE**
BLK | 60° | 30W | F097342B LL36_60 **WW** |
- DALI DIMMABLE**
BLK | 60° | 30W | F097342D LL36_60 **WW** |

ALTERNATIVE LIGHT	COLOUR	REPLACE WW BY
WARM WHITE	2700K	WW
NEUTRAL WHITE	3000K	NW
COLD WHITE	4000K	CW

traxx rithm

48V track


ugr < 19

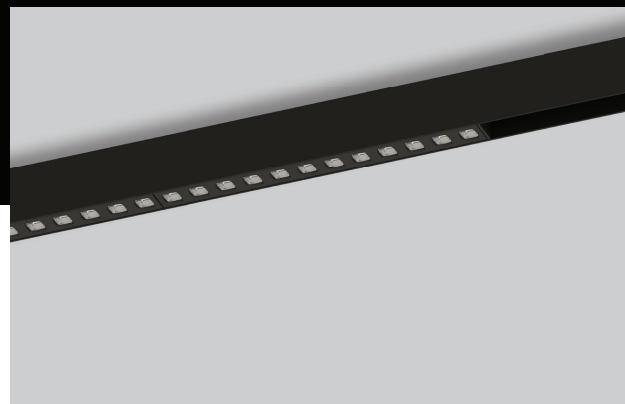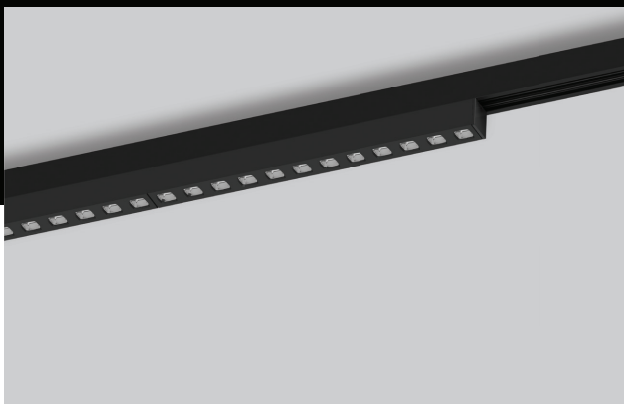

1x **LEDLINE** max 600lm 2700K

new

A A⁺ A⁺⁺




NON DIMMABLE		
BLK 45° 6W	F097102A LL6_45 WW	
1-10V DIMMABLE		
BLK 45° 6W	F097102B LL6_45 WW	
DALI DIMMABLE		
BLK 45° 6W	F097102D LL6_45 WW	
ALTERNATIVE LIGHT COLOUR	REPLACE WW BY	
WARM WHITE 2700K	WW	
NEUTRAL WHITE 3000K	NW	
COLD WHITE 4000K	CW	

CRI 90+	SDCM < 3	SO 500lm
DLI	5 YEAR WARRANTY	0.5m
passive	LM80 50000	

1x **LEDLINE** max 1700lm 2700K

new

A A⁺ A⁺⁺




NON DIMMABLE		
BLK 45° 15W	F097122A LL17_45 WW	
1-10V DIMMABLE		
BLK 45° 15W	F097122B LL17_45 WW	
DALI DIMMABLE		
BLK 45° 15W	F097122D LL17_45 WW	
ALTERNATIVE LIGHT COLOUR	REPLACE WW BY	
WARM WHITE 2700K	WW	
NEUTRAL WHITE 3000K	NW	
COLD WHITE 4000K	CW	

CRI 90+	SDCM < 3	SO 1500lm
DLI	5 YEAR WARRANTY	0.5m
passive	LM80 50000	

1x **LEDLINE** max 1100lm 2700K

new

A A⁺ A⁺⁺




NON DIMMABLE		
BLK 45° 10W	F097112A LL11_45 WW	
1-10V DIMMABLE		
BLK 45° 10W	F097112B LL11_45 WW	
DALI DIMMABLE		
BLK 45° 10W	F097112D LL11_45 WW	
ALTERNATIVE LIGHT COLOUR	REPLACE WW BY	
WARM WHITE 2700K	WW	
NEUTRAL WHITE 3000K	NW	
COLD WHITE 4000K	CW	

CRI 90+	SDCM < 3	SO 1000lm
DLI	5 YEAR WARRANTY	0.5m
passive	LM80 50000	

1x **LEDLINE** max 2100lm 2700K

new

A A⁺ A⁺⁺

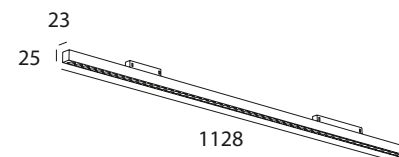


NON DIMMABLE		
BLK 45° 18W	F097132A LL21_45 WW	
1-10V DIMMABLE		
BLK 45° 18W	F097132B LL21_45 WW	
DALI DIMMABLE		
BLK 45° 18W	F097132D LL21_45 WW	
ALTERNATIVE LIGHT COLOUR	REPLACE WW BY	
WARM WHITE 2700K	WW	
NEUTRAL WHITE 3000K	NW	
COLD WHITE 4000K	CW	

CRI 90+	SDCM < 3	SO 1800lm
DLI	5 YEAR WARRANTY	0.5m
passive	LM80 50000	



traxx rithm lens


48V track

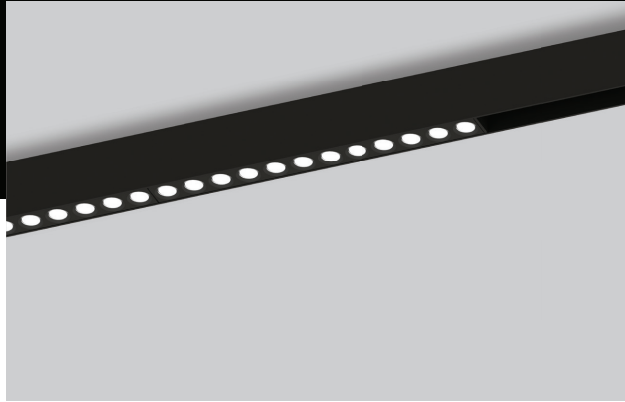

1x **LEDLINE** max 6001m 2700K

new

A A⁺ A⁺⁺



NON DIMMABLE

BLK	20°	5W	F097142A LL6_20 WW
BLK	30°	5W	F097142A LL6_30 WW

1-10V DIMMABLE

BLK	20°	5W	F097142B LL6_20 WW
BLK	30°	5W	F097142B LL6_30 WW

DALI DIMMABLE

BLK	20°	5W	F097142D LL6_20 WW
BLK	30°	5W	F097142D LL6_30 WW


ALTERNATIVE LIGHT COLOURS AVAILABLE
! SPREADLENS on request



1x **LEDLINE** max 17001m 2700K

new

A A⁺ A⁺⁺



NON DIMMABLE

BLK	20°	14W	F097162A LL17_20 WW
BLK	30°	14W	F097162A LL17_30 WW

1-10V DIMMABLE

BLK	20°	14W	F097162B LL17_20 WW
BLK	30°	14W	F097162B LL17_30 WW

DALI DIMMABLE

BLK	20°	14W	F097162D LL17_20 WW
BLK	30°	14W	F097162D LL17_30 WW


ALTERNATIVE LIGHT COLOURS AVAILABLE
! SPREADLENS on request



1x **LEDLINE** max 11001m 2700K

new

A A⁺ A⁺⁺



NON DIMMABLE

BLK	20°	10W	F097152A LL11_20 WW
BLK	30°	10W	F097152A LL11_30 WW

1-10V DIMMABLE

BLK	20°	10W	F097152B LL11_20 WW
BLK	30°	10W	F097152B LL11_30 WW

DALI DIMMABLE

BLK	20°	10W	F097152D LL11_20 WW
BLK	30°	10W	F097152D LL11_30 WW

ALTERNATIVE LIGHT COLOUR	REPLACE WW BY
WARM WHITE	2700K WW
NEUTRAL WHITE	3000K NW
COLD WHITE	4000K CW


! SPREADLENS on request



1x **LEDLINE** max 21001m 2700K

new

A A⁺ A⁺⁺

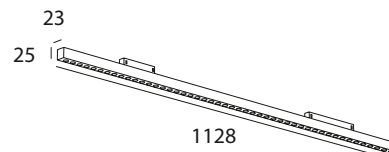

NON DIMMABLE

BLK	20°	18W	F097172A LL21_20 WW
BLK	30°	18W	F097172A LL21_30 WW

1-10V DIMMABLE

BLK	20°	18W	F097172B LL21_20 WW
BLK	30°	18W	F097172B LL21_30 WW

DALI DIMMABLE


BLK	20°	18W	F097172D LL21_20 WW
BLK	30°	18W	F097172D LL21_30 WW

ALTERNATIVE LIGHT COLOUR	REPLACE WW BY
WARM WHITE	2700K WW
NEUTRAL WHITE	3000K NW
COLD WHITE	4000K CW

! SPREADLENS on request



tracks

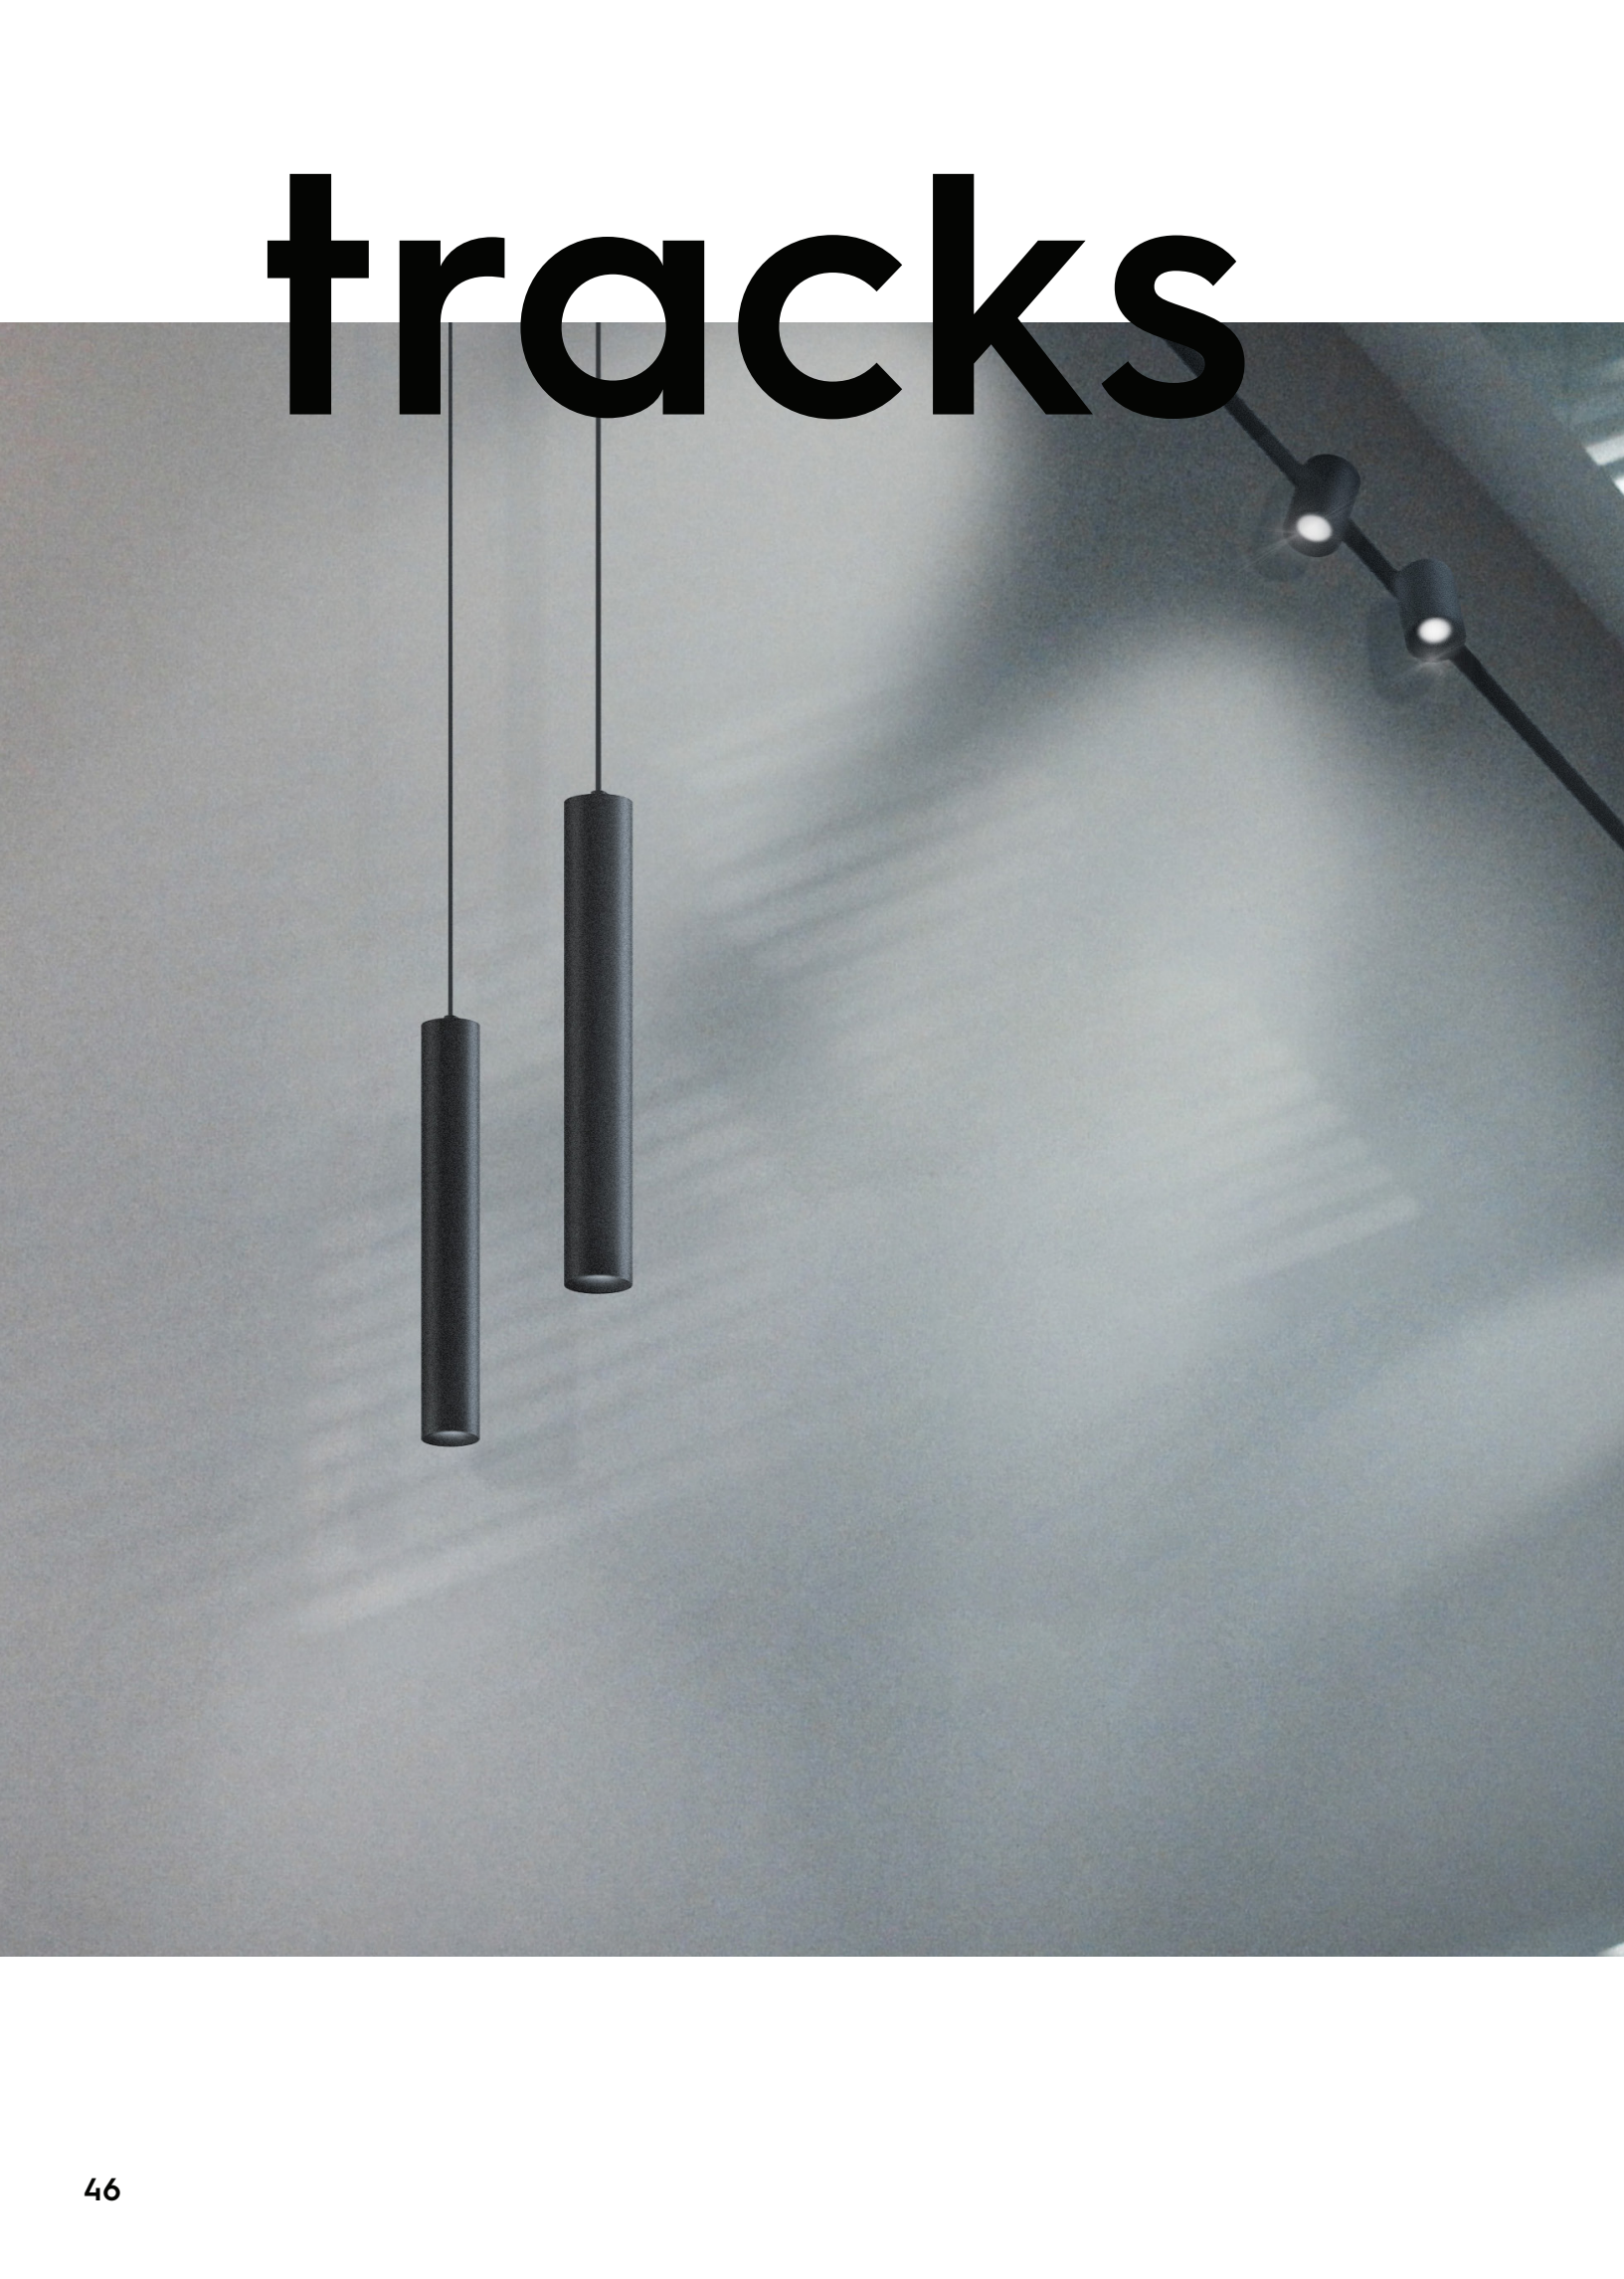




TRACKS
ACCESSORIES
DIMENSIONS
DIAGRAM



low voltage track


48V track

TYPE 1 SA SURFACE/PENDANT

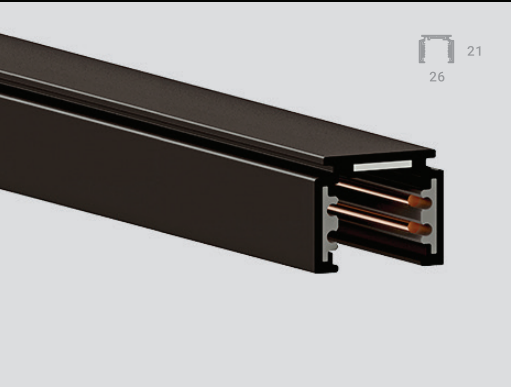


	1m	2m	3m
WHITE STR	F0411101	F0411111	F0411121
BLACK STR	F0411102	F0411112	F0411122

END CAP

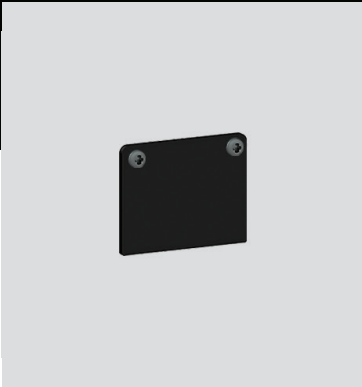


WHITE STR	F0411221
BLACK STR	F0411222

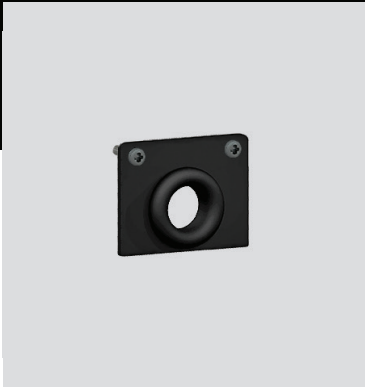


WHITE STR	F0411231
BLACK STR	F0411232

TYPE 1 RA TRIMLESS RECESSED

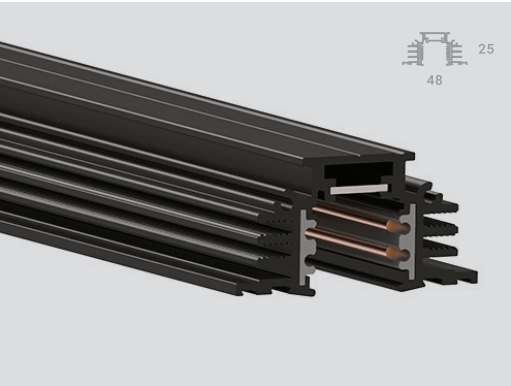


	1m	2m	3m
BLACK	F0411102R	F0411112R	F0411122R

END CAP

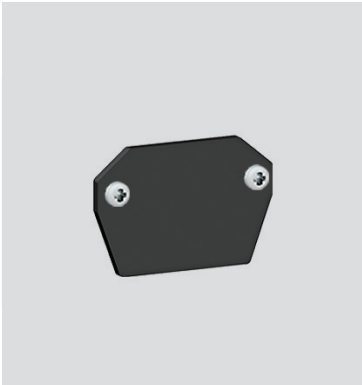

BLACK	F0411222R
-------	-----------

TYPE 2 RA TRIMLESS RECESSED


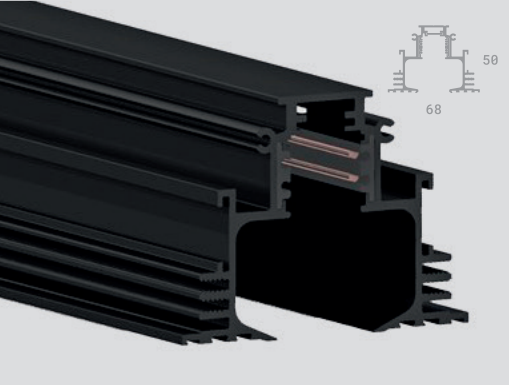


	1m	2m	3m
BLACK	F0421102R	F0421112R	F0421122R

END CAP





BLACK	F0421232R
-------	-----------




BRACKETS

TYPE 1 SA



BRACKETS
TRIMLESS MOUNTING



low voltage track



48V track

TYPE 1 SB

SURFACE/PENDANT



END CAP

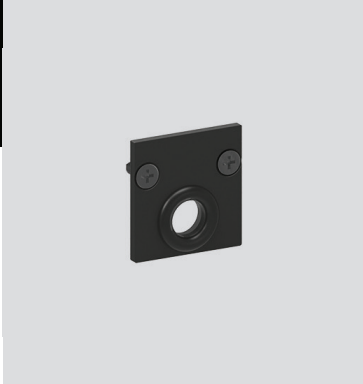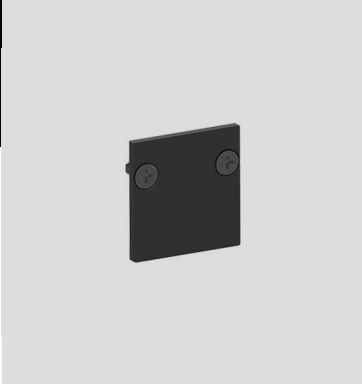

	1m	2m	3m
WHITE STR	F0431101	F0431111	F0431121
BLACK STR	F0431102	F0431112	F0431122

WHITE STR	F0431221
BLACK STR	F0431222

WHITE STR	F0431231
BLACK STR	F0431232

TYPE 2 SB

SURFACE/PENDANT



END CAP



	1m	2m	3m
WHITE STR	F0421101	F0421111	F0421121
BLACK STR	F0421102	F0421112	F0421122

WHITE STR	F0421221
BLACK STR	F0421222

WHITE STR	F0421231
BLACK STR	F0421232


TRACK TYPES

	HEIGHT	MOUNTING	BRACKET
TYPE	1	S	A
1	REGULAR	S SURFACE/SUSPENSION	BRACKETS TYPE A
2	TALL	R RECESSED TRIMLESS	BRACKETS TYPE B
			BRACKETS TYPE C




CORNER KITS

TYPE 1 SB

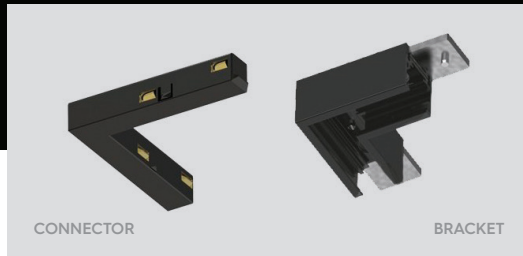

WHITE F041441
BLACK F041442


TYPE 2 SB

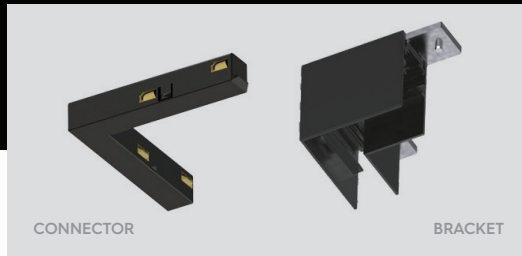


WHITE F041451
BLACK F041452

CONNECTION KITS

TYPE 1&2 SB

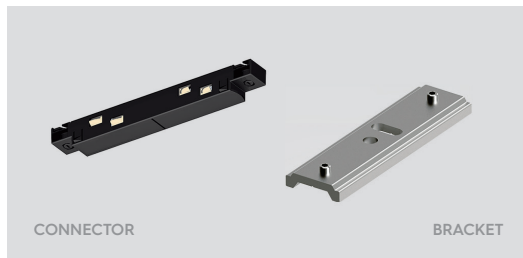


WHITE + ALU F041411
BLACK + ALU F041412

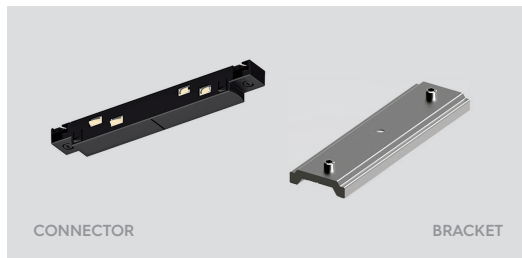

WHITE + ALU F041491
BLACK + ALU F041492

BRACKETS


TYPE 1&2 SB



ALU F041280



ALU F041270

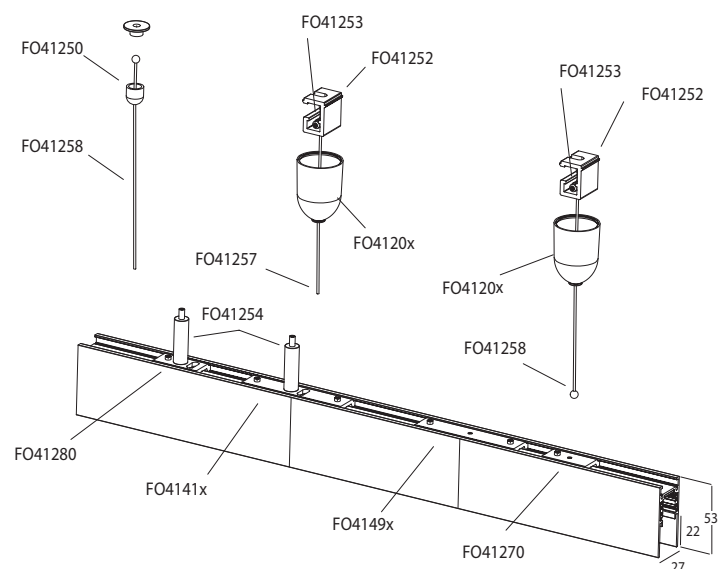

low voltage track


48V track

TYPE 2 RC TRIMLESS RECESSED




1m 2m 3m
BLACK F0431102R F0431112R F0431122R

END CAP

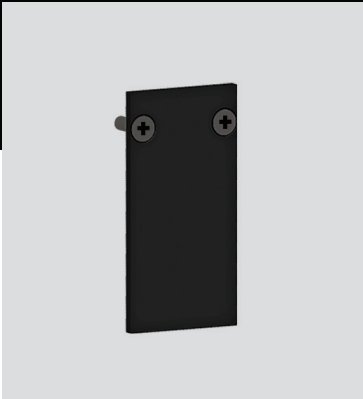

BLACK F0421222

COVER

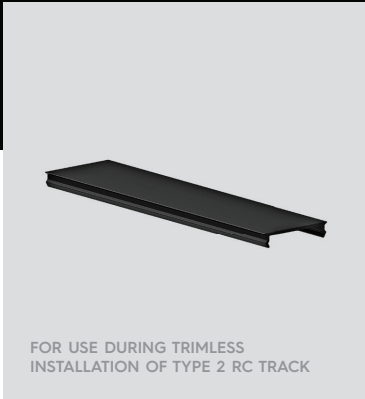

1m
BLACK F041293

BRACKETS TYPE C



STEEL BS41212DS



STEEL BS41213DS




WHITE BS41231DS
BLACK BS41232DS




WHITE BS41221DS
BLACK BS41222DS


CONNECTION KITS TYPE C

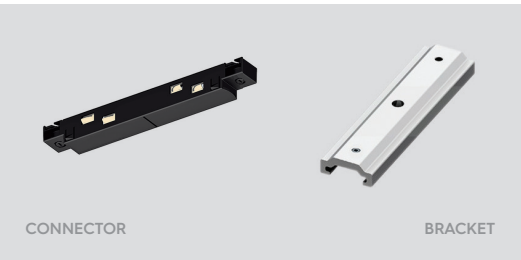

WHITE + STEEL F041421
BLACK + STEEL F041431

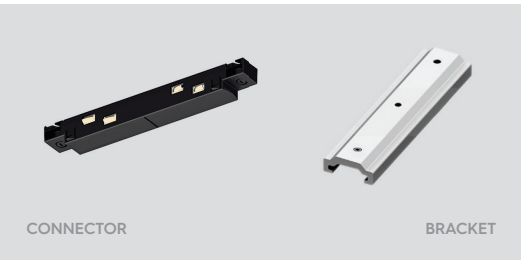

WHITE + STEEL F041501
BLACK + STEEL F041502

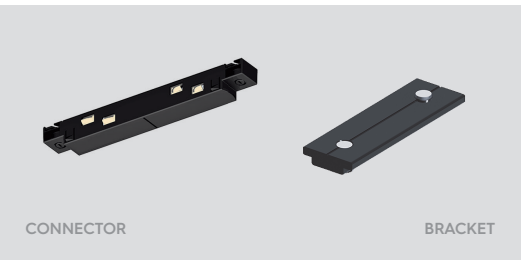

BLACK F041472



UNIVERSAL SUSPENSION ACCESSORIES



1,5M F041257
3M F041259



ALU F041252



WHITE F041201
BLACK F041202



ALU F041250



1,5M F041258
3M F041249




ALU F041253




ALU F041254

CUTTING TOOL

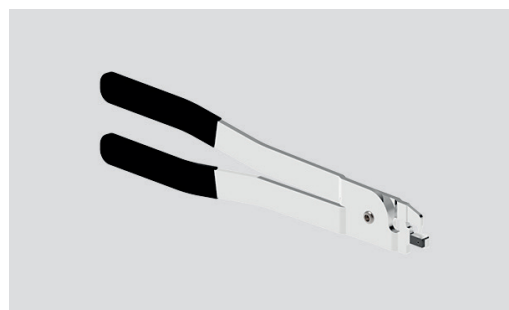


CUTTING TOOL FOR TRACK CONDUCTORS
! REQUIRED FOR CUTTING TRACKS

BS1200DS

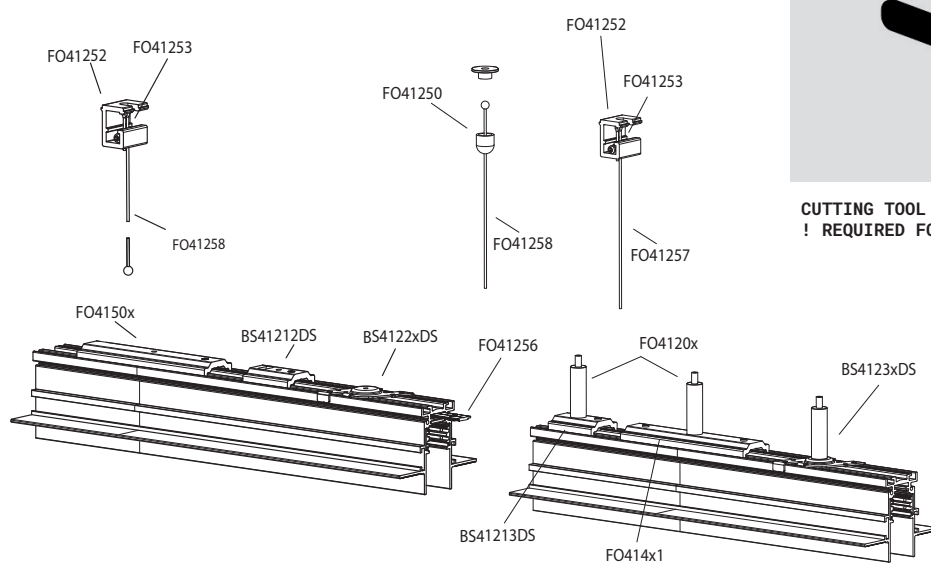


low voltage track


section drawings



TYPE 1 SB




TYPE 1 SA

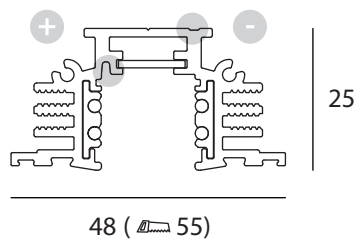


MIN. INSTALLATION HEIGHT: 105 mm

TYPE 1 RA

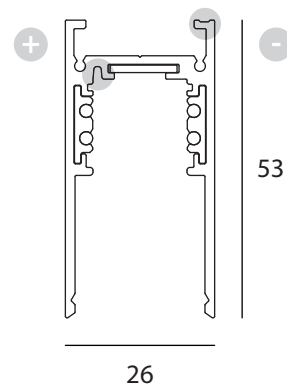


TYPE 2 SB

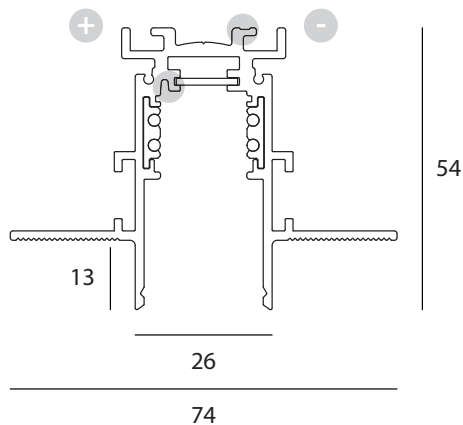

INSTALL RAIL BEFORE ADDING CEILING

TYPE 2 RC

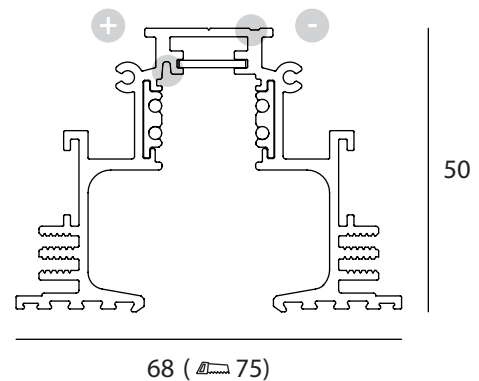

MIN. INSTALLATION HEIGHT: 125 mm

TYPE 2 RA



casambi ready

iOS & Android





low voltage track

power supply

POWER SUPPLIES



DRIVER LCU 48V 75W F0 SR

NON-DIMMABLE 75W 359mA 48V 100 x 235 x 31 mm |BS8720




DRIVER LCU 48V 150W F0 SR

NON-DIMMABLE 150W 707mA 48V 100 x 235 x 31 mm |BS8722




DIN RAIL POWER SUPPLY 240 48VDC 5A

NON-DIMMABLE 240W 5A 48V VDC MAX 63 x 125,2 x 113,5 mm |BS8724

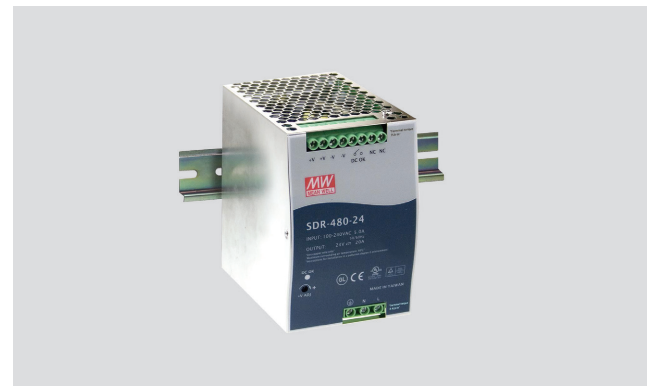

DIN RAIL POWER SUPPLY 480 48VDC 10A

NON-DIMMABLE 480W 10A 48V VDC MAX 85,5 x 125,2 x 128,5 mm |BS8725

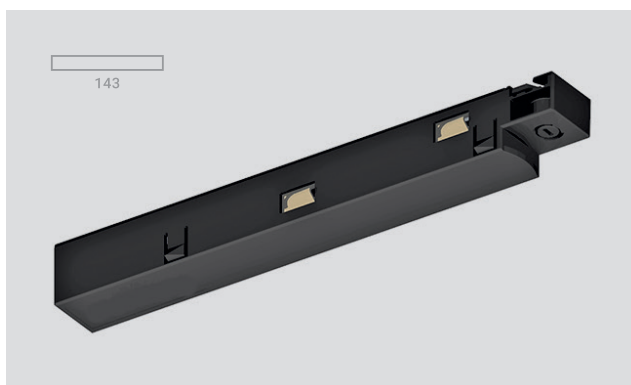

POLARIZED END FEED

WHITE
BLACK

LEFT

F041241
F041242

RIGHT

F041221
F041222



**GEAR BOX WITH POWER SUPPLY
LCU 48V 75W NON-DIMMABLE**


WHITE
BLACK

F041511
F041512


low voltage track

wiring diagram


UNIVERSAL DALI

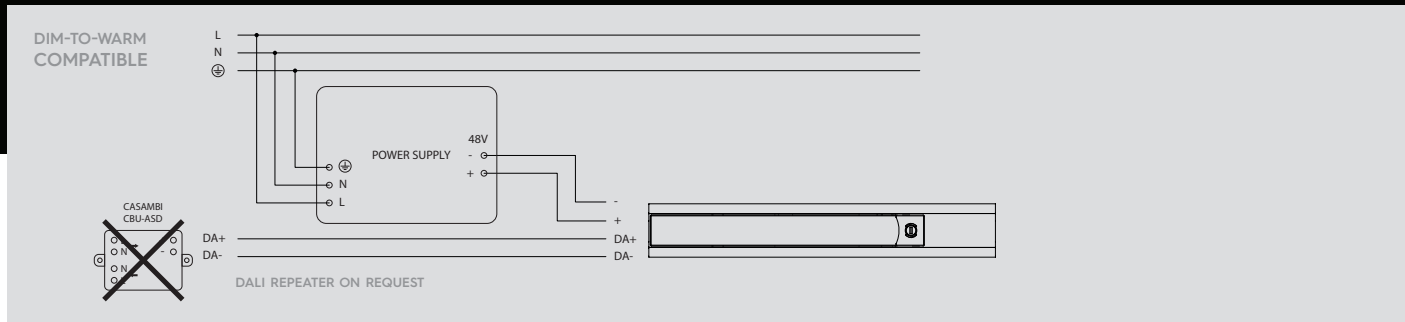


BLUETOOTH WIRELESS CONTROL

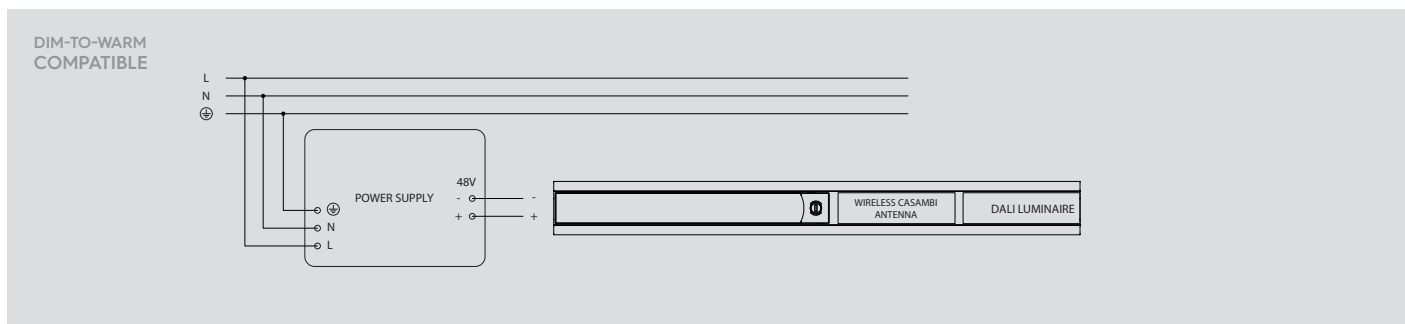

FIXED OUTPUT

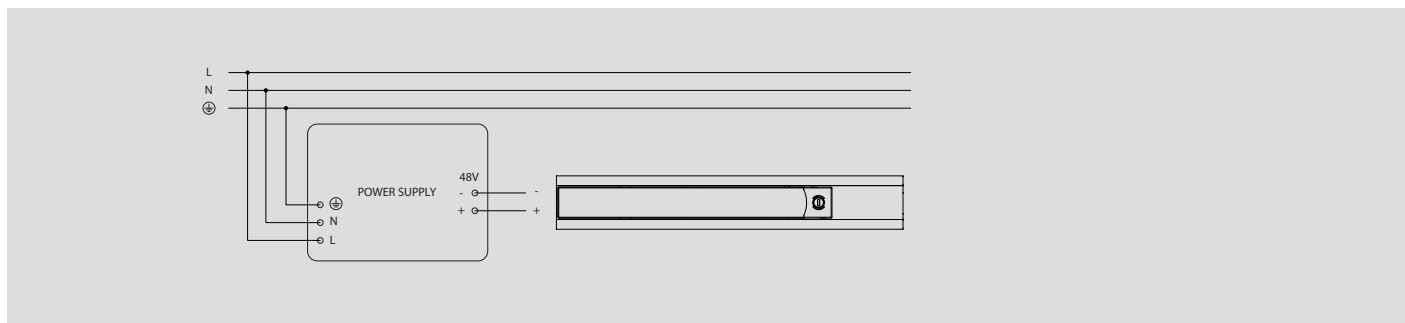

1-10V DIMMING SIMULTANUOUS DIMMING FOR ALL LUMINAIRES ON THE ELECTRICAL CIRCUIT

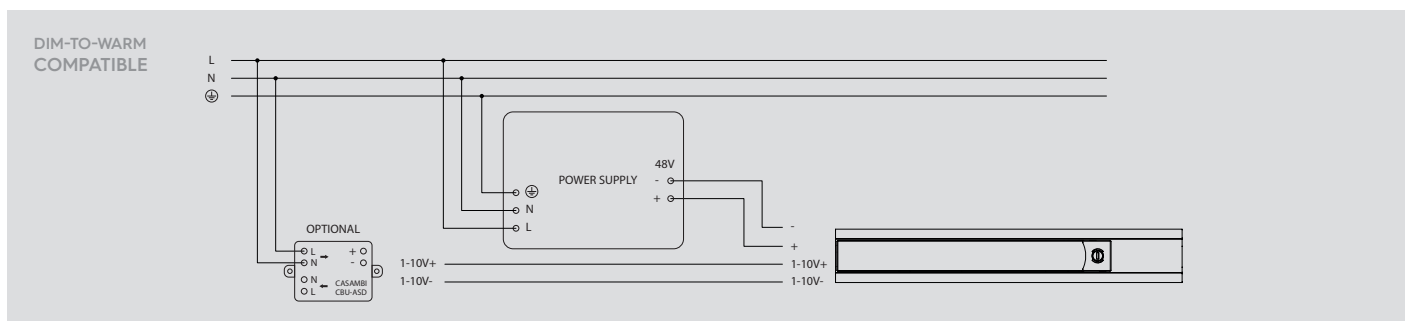



discover all products

on orbit-lighting.com



All information in this brochure replaces all preceding information.

We are not responsible for printing errors, wrong dimensions, descriptions or technical data.

The company reserves the right to amend all products herein detailed, any time and without prior notice.

Unauthorized reproductions and copies of this brochure are prohibited.

FOR FURTHER TECHNICAL INFO OR ERRATA, PLEASE VISIT WWW.ORBIT-LIGHTING.COM

