

profili - profiles

ma_12

new

ma_12, surface mounted



Profilo alluminio 25 x 25mm, completo di diffusore e strip LED, 2 testate di chiusura, molle di ancoraggio, driver escluso.
25 x 25mm aluminium profile, 2 end caps, complete with diffuser and LED strip, anchoring springs, driver excluded.

1301.0012.500.-- 92 94
 L=520mm, 9w, 24V, 3000°K, 1100lm, CRI>80, 84led, IP20, class A+

1301.0012.1000.-- 92 94
 L=1020mm, 18,5w, 24V, 3000°K, 2200lm, CRI>80, 168led, IP20, class A+



1301.0012.1500.-- 92 94
 L=1520mm, 28w, 24V, 3000°K, 3300lm, CRI>80, 252led, IP20, class A+

cod. 1301.0012.L.2700.-- per 2700°K
 cod. 1301.0012.L.4000.-- per 4000°K

94
 bianco superopaco
 white ultramatte

92
 nero superopaco
 black ultramatte



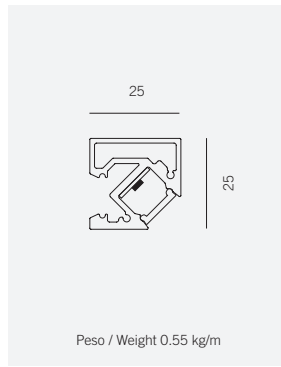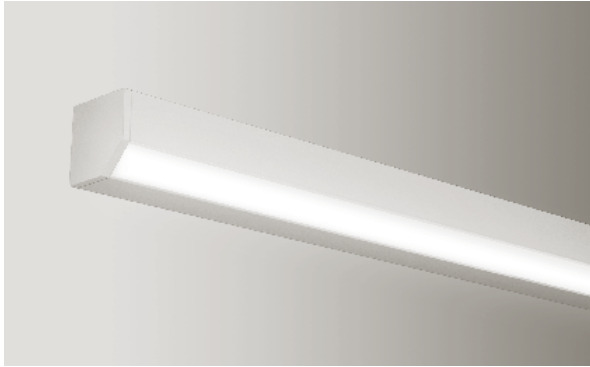

Peso / Weight 0.55 kg/m

MA_12 + [gear icon] + LED



Profilo alluminio 25 x 25mm L=max 3 mt, diffusore e strip LED, tagliato a misura senza testate di chiusura, driver escluso.
 25 x 25 aluminium profile L=max 3 mt, complete with mounting device, diffuser, cut on measure without end caps, driver excluded.

1301.0012.120.-- 92 94
 9,6w/mt, 24V, 3000°K, 900lm/mt, CRI>80, mod:5cm, 120led/mt, IP20, class A+

1301.0012.240.-- 92 94
 18,5w/mt, 24V, 3000°K, 2200lm/mt, CRI>80, mod:4,2cm, 168led/mt, IP20, class A+

cod. 1301.0012.***.2700.-- per 2700°K
 cod. 1301.0012.***.4000.-- per 4000°K

MA_12 + [gear icon]



Profilo alluminio 25 x 25mm L=max 3 mt, diffusore, tagliato a misura completo di lavorazioni per il montaggio, senza testate di chiusura, driver e strip LED esclusi.
 25 x 25 aluminium profile L=max 3 mt, complete with mounting device, diffuser, cut on measure complete with machining for mounting, without end caps, driver and strip LED excluded.

1301.0012.00.-- 92 94

MA_12 L = 3000



Profilo alluminio 25 x 25mm, in barre da 3 metri senza taglio a misura e senza lavorazioni per il montaggio, completo di diffusore, senza testate di chiusura, driver e strip LED escluso.
 25 x 25mm aluminium profile, without machining and in 3 mt leght profile without cut on measure, complete with mounting device, diffuser, without end caps, driver and strip LED excluded.


● **1301.0012.01.--** 92 94

● **1301.0012.01.M10.--** 92 94

Imballo multiplo da 10 pezzi/ multiple pack of 10 pieces

testata di chiusura compatibile con il lato destro (1pz)

end cap compatible to the right side (1pc)




1301.6012.92.10 ■ 1 pc ●
 1301.6012.94.10 □ 1 pc ●

1301.6012.92 ■ 1 pc ●
 1301.6012.94 □ 1 pc ●

testata di chiusura compatibile con il lato sinistro (1pz)

end cap compatible to the left side (1pc)




1301.5012.92.10 ■ 1 pc ●
 1301.5012.94.10 □ 1 pc ●

1301.5012.92 ■ 1 pc ●
 1301.5012.94 □ 1 pc ●

molle per ancoraggio a plafone

fixing springs for surface mounting

1 staffa di ancoraggio ogni mt + 1 (minimo 2 pezzi).
 1 bracket every mt + 1 (minimum 2 pcs).




1320.1112.10 10 pcs ●
 1320.1112 1 pc ●

molle per giunzione lineare

linear connection springs

Per profili superiori ai 3 mt ordinare 1 giunto ogni multiplo di 3 mt.
 For profiles with lenght over 3 mt, please order 1 joint every 3 mt.




1320.1112.10 10 pcs ●
 1320.1112 1 pc ●

taglio angolare

corner's cut

orizzontale 270° / horizontal 270°




1301.3327

taglio angolare

corner's cut

orizzontale 90° / horizontal 90°



1301.6327

primer per incollaggio strisce LED

primer to install LED strip



1324.0000.10 10pz/10pcs ●
 1324.0000 1pz/1pc ●

driver standard - 24V

standard driver - 24V

15W 1.024015 ●
 20W 1.024020 ●
 30W 1.024030 ●
 50W 1.024050 ●
 75W 1.024075 ●

driver standard - 24V

standard driver - 24V

versioni ad alta potenza, IP67.

hi power versions, IP67

100W 1.97393 ●
 150W 1.97759 ●
 200W 1.97745 ●