

# Uw

## Body

Aluminium profile with 25 micron maximum corrosion resistance anodisation in matte finish or electrostatic 100% polyester paint with textured finish suitable for adverse climate conditions. Anodised aluminium end caps in matte finish.

## Diffuser

High-performance acrylic diffuser.

## Reflector


Asymmetrical aluminium reflector with 98% reflection. Developed in partnership with Bartenbach GmbH, its geometry outputs all its light as a uniform asymmetrical beam.

## Accessories

Fitting accessories for different applications are available.

## Light Source

O/M LED modules with excellent colour consistency (2 step-MacAdam) and long operating lifespan (>50.000h; L80/B10). LED CRI>90 2700K, 3000K; CRI>80 4000K, Tunable White.

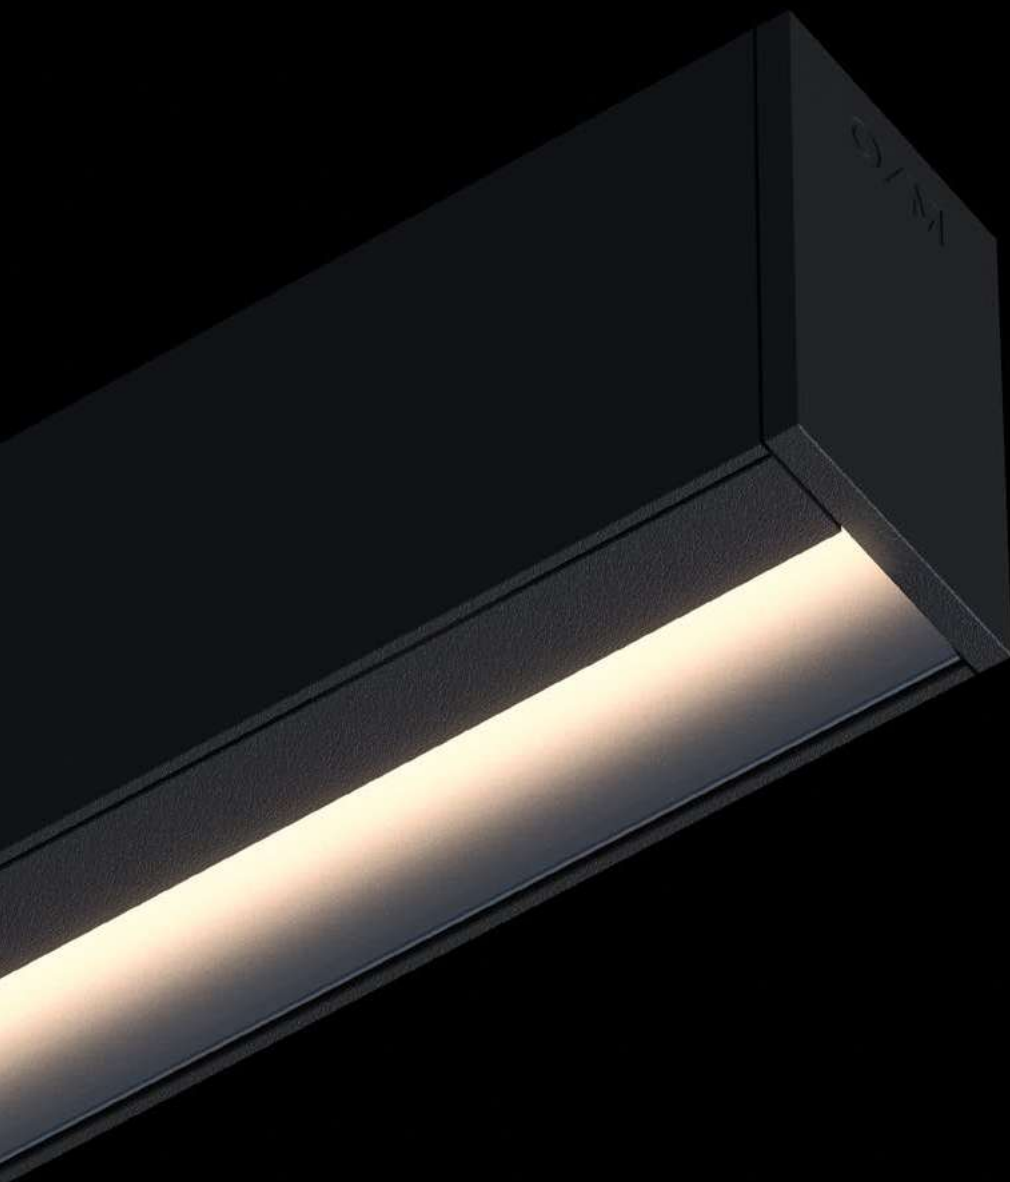


Visual comfort





Tunable white




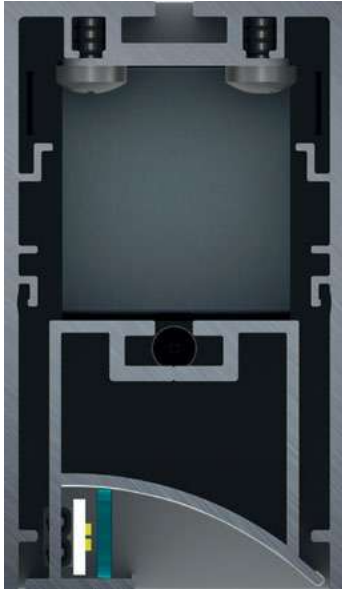


The asymmetrical light effect can evenly cover an entire wall from a distance of as small as  $\frac{1}{5}$  of the height of the wall, assuring visual comfort while avoiding glare and shadow projection on the wall.

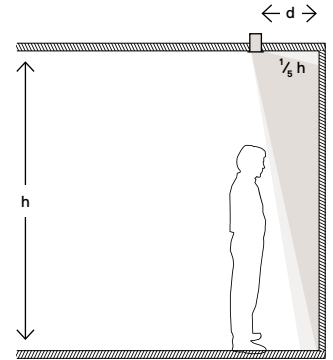


**Uw Recessed**



**Wallwasher**



**Uw Surface / Pendant**



- Finishes**    ○ .01 White    ● .02 Black    ● .10 Anodised aluminium



**Made-to-measure**  
Choose the length and layout of the system exactly as you want it, to model the right lighting functions for different tasks.